




CATALOGUE

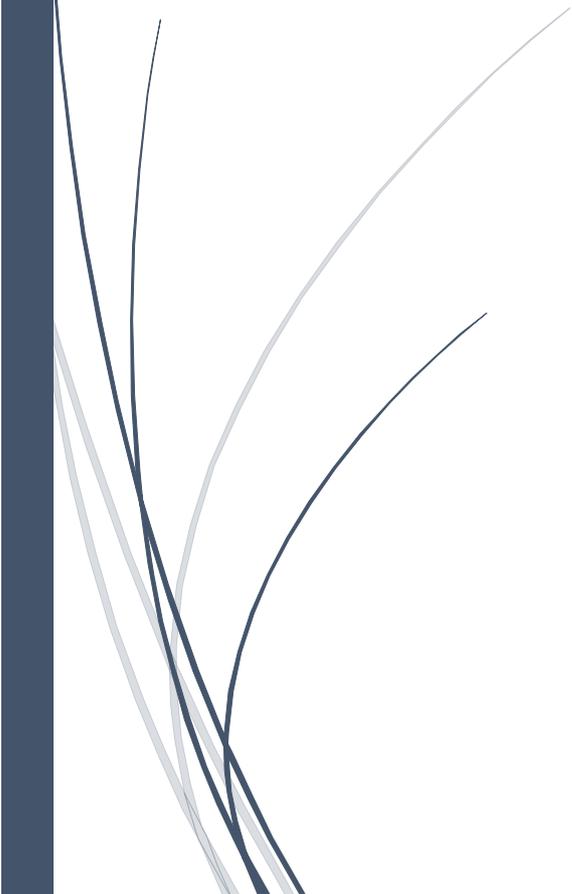

Adjustable gauged wrench (left-threaded)

649...L



NEW

Part no.	Size	Length	Weight	Packing
	mm	mm	g	Q'ty/N.W/G.W/CUFT
649150L	20	150	134	100/13.4/14.4/1.4'
649200L	24	200	240	60/14.4/15.4/1.1'
649250L	29	250	424	30/12.7/13.7/0.96'
649300L	33	300	681	20/13.6/14.6/0.87'
649450L	60	450	1760	10/17.6/18.6/0.7'

Black suitcase with 106pcs of tools

50234-107S



Part no.

Contents:

711 1N...2N	2-Insulated Phillips screwdriver PH.1; PH.2
713 03N...065N	4-Insulated slotted screwdriver 3; 4; 5.5; 6.5
7112S	1-Phillips stubby screwdriver PH.2
713065S	1-Slotted stubby screwdriver 6.5
711 1...3	3-Phillips screwdriver PH.1; PH.2; PH.3
690725C	1-Insulated water pump pliers (Curved jaw) 10"
649250A	1-Adjustable gauged wrench 250mmL
690416C	1-Insulated long nose pliers 6"
690318C	1-Insulated combination pliers 7"
690516C	1-Insulated diagonal cutting pliers 6"
691216C	1-Insulated wire stripper pliers 6"



1/12.7/13.7/1.65'



Bolt cutter

9U0501



		<i>l</i>	
Part no.	packing	Length	g
9U050130	6/23.8/24.8/2.1'	762-30"	3967
9U050136	5/30.4/31.4/1.8'	863-36"	6080
9U050142	3/28.0/29.0/2'	1066-42"	9330

Bolt Cutters

HN00310



- + Centre cut jaw pattern
- + Drop forged handles
- + Carbon steel jaws hardened to give long life
- + For cutting high tensile material up to 40HRC

Air blow gun

9U0202 / 9U0203



9U0202

It is suitable for removing and cleaning any kinds of chip.

Specification:

- Length: 4" (9U0202) / 13" (9U0203)
- Working pressure: 78~120 PSI / 5~8 KGS
- Thread type: 1/4"



9U0203

9U0202  60/10/11/1.6'  167g

9U0203  50/12/13.5/2.9'  240g



Inflating Gun

D.I.Y

Suitable for: Inflating car tyres, bicycle tyres, air beds & inflatables, footballs etc
PAB1204



Suction Feed Low Pressure Spraygun

D.I.Y

Feed type: Pressure
Standard nozzle: 1.3mm
Optional nozzle: 1.2mm
Average air consumption:
3CFM / 85L/min
Cup Capacity: 0.8L
Recommended Air
Pressure: 10 -40Psi
Canister Capacity: 0.8L
Paint Nozzle: 1.3mm
TOOS1784



Suction Feed High Pressure Spray Gun

Industrial

Standard Nozzle: 1.6mm
Cup Capacity: 1L
Avg Air Consumption:
10CFM / 280L/min
Recommended Air Pressure:
355 - 480kPA/ 3.5 - 4.8 bar
Canister Capacity: 0.8L
Adjustable spray pattern
Non-bleeder type, siphon feed
External mix nozzle
Dual Action trigger
Air inlet 1/4" BSP
Paint nozzle: 2.0mmØ
Professional quality
Min recommended compressor:
2HP/ 1.5KW and above
TOOS1785



Air Duster

Semi-Industrial
Short nozzle
Maximum pressure: 9 bar
Min compressor required: 1.1KW
Pressure required: 3 - 8 bar
Suitable for blowing and
cleaning away cuttings etc
TOOS1751



Blow Gun

Semi-Industrial
Extended nozzle
Air inlet: 6.5mm
Suitable for unblocking oilways
in engines & machine parts,
cleaning electrical circuit boards
& computers, general cleaning
duties in & around the workshop
PAB1208

CUSHION GRIP 6 PIECE PARALLEL/FLARED/PHILLIPS SET



- Parallel 6.5mm X 200mm
- Flared Instrument 3mm X 75mm, 5mm X 100mm, 6.5mm X 150mm
- Phillips PH1 X 75mm, PH2 X 150mm

SKU	DESCRIPTION
0-65-007	6pce Parallel/Flared/Phillips


CUSHION GRIP 6 PIECE FLARED/PHILLIPS SET



- Flared 5mm X 100mm, 6.5mm X 45mm, 6.5mm X 150mm
- Phillips PH1 X 75mm, PH2 X 45mm, PH2 X 100mm
- Voltage Tester

SKU	DESCRIPTION
0-65-009	6pce Flared/Phillips

6 PCS CUSHION GRIP™ SCREWDRIVER SET WITH BONUS (TESTER INCLUDED)




- Phillips® PH1 x 100mm
- Phillips® PH2 x 45mm
- Phillips® PH2 x 100mm
- Slotted 5mm x 100mm
- Slotted 6.5mm x 45mm
- Slotted 6.5mm x 100mm



SKU #	Description	Box Qty
STHT92002-8	6 PCS Cushion Grip™ Screwdriver Set with Bonus (Tester included)	12

8 PCS CUSHION GRIP™ SCREWDRIVER SET




- Phillips® PH0 x 60mm
- Phillips® PH1 x 100mm
- Phillips® PH2 x 45mm
- Phillips® PH2 x 150mm
- Slotted 3mm x 75mm
- Slotted 5mm x 100mm
- Slotted 6.5mm x 45mm
- Slotted 6.5mm x 150mm



SKU #	Description	Box Qty
STHT92004-8	8 PCS Cushion Grip™ Screwdriver Set	12

6 PCS CUSHION GRIP™ SCREWDRIVER SET



- Phillips® PH1 x 100mm
- Phillips® PH2 x 150mm
- Std Parallel 5mm x 100mm
- Std Parallel 5mm x 150mm
- Slotted 6.5mm x 150mm
- Slotted 5mm x 100mm



SKU #	Description	Box Qty
STHT65242-8	6 PCS Cushion Grip™ Screwdriver Set	12

7 PCS VDE SCREWDRIVER SET

 3.0 x 100mm
 4.0 x 100mm
 5.5 x 125mm
 6.5 x 150mm

 3.0 x 70mm

 PH1 x 80mm
 PH2 x 100mm






- Insulation directly injection-moulded around the blade
- Ergonomic, shock resistant, anti slip handle and for greater torque to be applied with less effort
- Each screwdriver is individually tested to 10,000V in a water bath for 10 SCEa



SKU #	Description
STHT65980-8	7 PCS VDE Screwdriver Set




PVC HANDLE SLOTTED FLARED

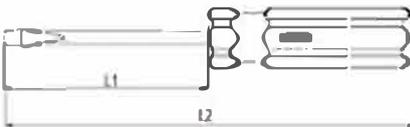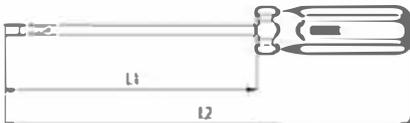

- Comfortable handle
- Chrome plated Cr-V bar resists corrosion
- Magnetic tips for secure grip on fasteners
- Color coordinated handles: red (standard), blue (Phillips®), black (Torx)



CUSHION GRIP™ SLOTTED FLARED

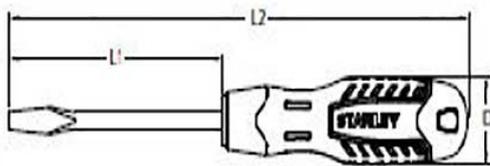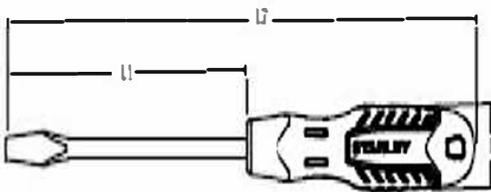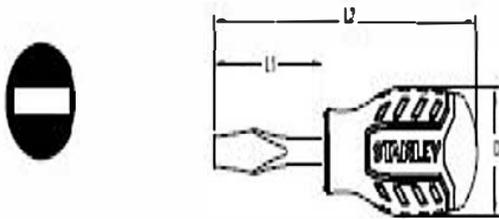

- Bi-material (PP+TPR) soft grip handle providing excellent comfort
- Chrome Vanadium (Cr-V) blade for durability
- Magnetic tips for easy pick up and screw locator
- Three-sided handle allowing more torque with anti-slip and anti rolling features reducing handle slippage
- Ergonomic design with finger point in neck-down area for precise control
- Built-in hang hole for easy storage
- Screw tip identification on the handle for organization





DIAMOND ADJUSTABLE WRENCH			
ITEM CODE	SIZE	LIST PRICE (RM) / PC	PCS / CTN
ADJ-15"	15" - 3750MM		6 PCS
ADJ-18"	18" - 450MM		6 PCS
ADJ-24"	24" - 600MM		6 PCS

ADJUSTABLE WRENCHES



SKU	OLD SKU	TYPE	DESCRIPTION
87-430-1-23	-	Adjustable Wrench	100mm / 4"
STMTB7431-B	1-87-431	Adjustable Wrench	150mm / 6"
STMTB7432-B	87-432-1-23	Adjustable Wrench	200mm / 8"
STMTB7433-B	87-433-1-23	Adjustable Wrench	250mm / 10"
STMTB7434-B	87-434-1-23	Adjustable Wrench	300mm / 12"
STMTB7435-B	87-435-1-23	Adjustable Wrench	375mm / 15"
1-87-371	-	Adjustable Wrench	450mm / 18"
97-797	-	Adjustable Wrench	600mm / 24"

WRENCH & HANDLE


STANLEY

Slimline 9 Piece Combination Wrench Set

Product Code	CONTENTS	Weight (g)	Box/ Ctn	List Price RM/set	Offer Price RM/set
87-034-1	8, 9, 10, 11, 12, 13, 14, 15, 17mm Heavy-duty nylon pouch, Inner box	910	1/16	191.40	
87-033-1	10, 11, 12, 13, 14, 15, 16, 17, 19mm Heavy-duty nylon pouch, Inner box	1490	1/16	209.70	



NEW GEAR WRENCHES



Anti Slip



TM



- Cr-V material
- Mirror finish
- Anti-slip open ends
- 5° increment

SKU	TYPE	DESCRIPTION
STMT89934-8B	Gear Wrench	8 MM
STMT89936-8B	Gear Wrench	10 MM
STMT89937-8B	Gear Wrench	12 MM
STMT89938-8B	Gear Wrench	13 MM
STMT89939-8B	Gear Wrench	14 MM
STMT89940-8B	Gear Wrench	15 MM
STMT89941-8B	Gear Wrench	16 MM
STMT89944-8B	Gear Wrench	19 MM

Slimline 12 Piece Combination Wrench Set

Product Code	Contents	Weight (g)	Box/Ctn	List Price RM/set	Offer Price RM/set
95-094-1	6, 8, 9, 10, 11, 12, 13, 14, 15, 17, 19, 22mm	3600	1/10	270.30	



117 Piece Wrench Merchandiser Set

Product Code	Contents	Weight (g)	Box/Ctn	List Price RM/set	Offer Price RM/set
89-897A	6pcs "Slimline" combination wrench: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19mm 4pcs "Slimline" combination wrench: 21, 22, 24, 27, 25, 26, 30, 32mm Merchandiser Board			3,880.90	



6pc Combination wrench set (Jumbo)

50651S



Part no.

755 1.1.4...1.5.8

Content:

6-Combination wrench (SAE)

1-1/4"; 1-5/16"; 1-3/8"; 1-7/16";

1-1/2"; 1-5/8".

7pc Hex long key set

5076L



NEW

Part no.

764 015L...06L

Contents:

7-Hex long key

1.5; 2; 2.5; 3; 4; 5; 6mm



100/12/13/1'



120g

Yato - Combination Spanner



7pc Hex extra long key set (MM)

5072XL			
Part no.	Tip	40/18.2/19.2/1.1'	450g
764 025XL... 10XL	Content: 7-Hex extra long key 2.5; 3; 4; 5; 6; 8; 10 mm		

7pc Hex extra long key set (SAE)

5072XLS			
Part no.	Tip	40/17.5/18.5/1.1'	450g
764 3.32XL... 3.8XL	Content: 7-Hex extra long key 3/32"; 1/8"; 5/32"; 3/16"; 1/4"; 5/16"; 3/8"		



11pc Double open end wrench set (MM)

5112		
Part no.	10/19.4/20.4/1.2'	1940g
754 0607...2427	Content: 11-Double open end wrench 6x7; 8x9; 10x11; 12x13; 14x15; 16x17; 18x19; 20x22; 21x23; 23x26; 24x27 mm	

11pc Double open end wrench set(SAE)

5112S		
Part no.	10/20.0/21.0/1.2'	2000g
7540608S... 2932S	Content: 11-Double open end wrench 1/4"x5/16"; 5/16"x3/8"; 3/8"x7/16"; 1/2"x9/16"; 9/16"x5/8"; 5/8"x11/16"; 11/16"x3/4"; 13/16"x7/8"; 15/16"x1-1/16"; 1"x1-1/8"; 1-1/8"x1-1/4"	

20" Chain wrench

61914

• 20" chain



20/20.0/21.0/0.78'



1kg

1/2" 6pt. Flank impact socket

44545



Part no.	Size	Length	Weight	
		mm	g	pc/box
44545	45	57	539	10

Diagonal pliers

612B200



Part no.	Length	Packing	Weight
	mm	Q'ty/N.W/G.W/CUFT	g
612B200	200-8"	60/20.9/21.9/2'	290

TRAGBARE BUTANE-KOCHER



Portable butane cooker, camping stove gas cooker in suitcase.

Properties: This gas stove is made of high quality sheet iron, which is durable and long life. Piezo electronic ignition aluminum burner head with windscreen.



PALLET TRUCK



MAX. LIFTING HEIGHT (MM)
LESS THAN 110

TRUCK WEIGHT (KG)
80-85 (APPROX.)

NUMBER OF FRONT WHEELS
DOUBLE

MATERIAL OF THE WHEELS
NYLON

2 TON HYDRAULIC TROLLEY JACK LIFT HYDRAULIC HAND TRUCK



3 TON HYDRAULIC TROLLEY JACK LIFT HYDRAULIC HAND TRUCK






**MAX. LIFTING HEIGHT (MM)
LESS THAN 110**

**TRUCK WEIGHT (KG)
80-85 (APPROX.)**

**NUMBER OF FRONT WHEELS
DOUBLE**

**MATERIAL OF THE WHEELS
NYLON**

HYDRAULIC HAND STACKER

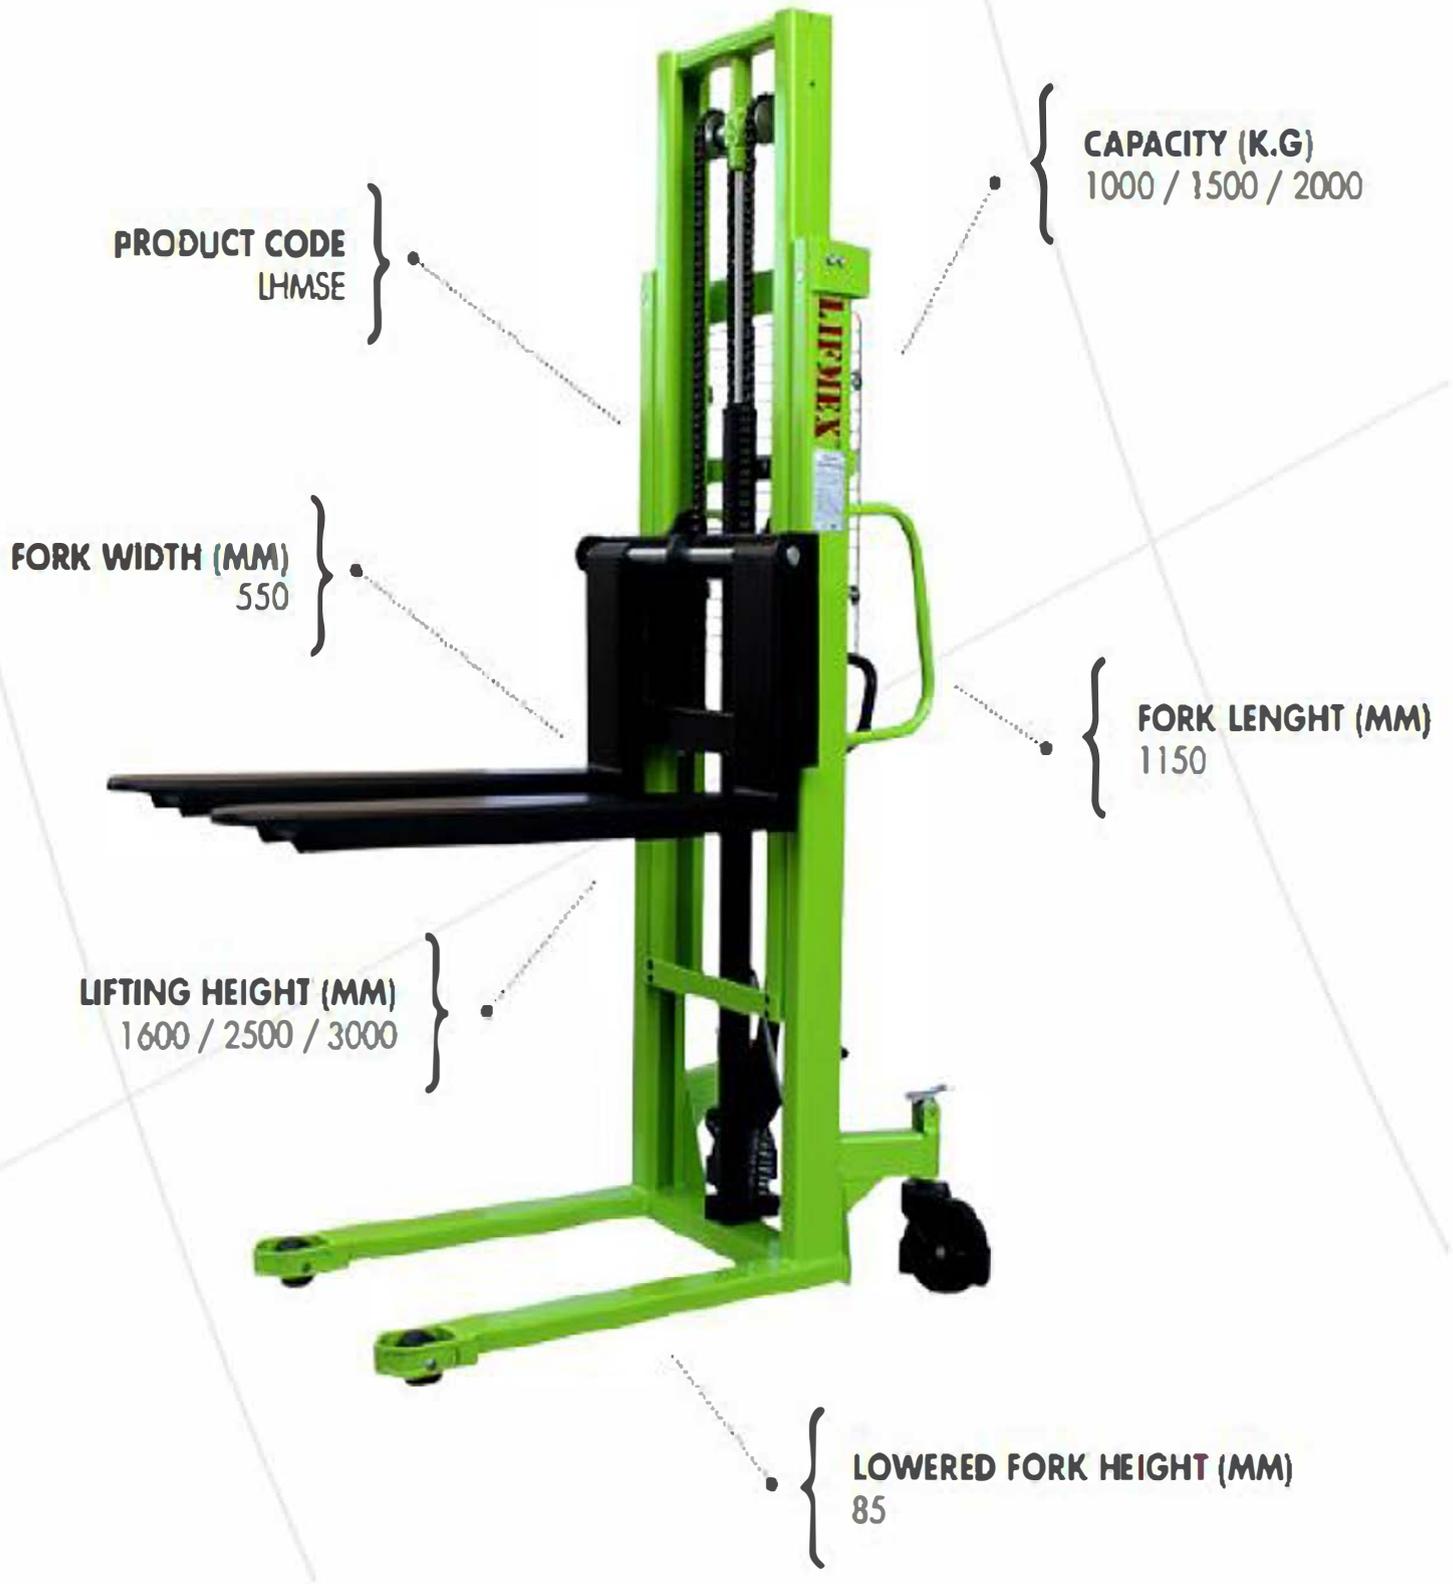

PRODUCT CODE
LHMSE

CAPACITY (K.G)
1000 / 1500 / 2000

FORK WIDTH (MM)
550

FORK LENGHT (MM)
1150

LIFTING HEIGHT (MM)
1600 / 2500 / 3000

LOWERED FORK HEIGHT (MM)
85

**HAND PALLET STACKER 1
TON 1.6 M MANUAL
FORKLIFT MANUAL PALLET
STACKER**


1 TON 1.6M



**ELECTRIC
PALLET LIFT
1.6M 2 TON**



HYDRAULIC SCISSOR LIFT TABLE

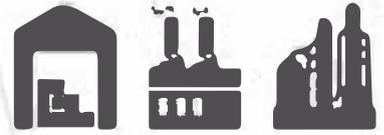

HANDLE HEIGHT (MM)
980





2 TON HYDRAULIC ENGINE HOIST









5kw Air Cooled Diesel Inverter Generator Silent Small Generator.





Self-tightening clamp

9M1602



- Self-tightening clamp: grips tighter as it is pulled.
- Compact and lightweight for pulling from many places.
- Minimum of 1-1/2" reach-around for flanges, cowls, pinch welds, and lips.
- Butts against panels where only narrow bite available.
- 1-1/4" (31.8mm) jaws give added grip.
- Capacity: 6 ton



 8/18.0/19.0/0.56'

 2250g

Self-tightening clamp

9M1601



- Minimum size, maximum capability for tight places.
- Responsive, spring-loaded, one-handed application for fast action pulls.
- Round wedge allows chain to be pulled free of twists.
- Aggressive cross-hatched tooth design.
- Capacity: 5 ton

 15/16.5/17.5/0.59'

 1100g

Steel creeper

9U0311

- Six wheels make the movements easily.
- The pillow is removable and replaceable.
- Size: 93x50x12 cm



1/8.0/9.0/1.8'




8kg

SET NO. J54210 - 1/2" DRIVE 22 PC. METRIC SOCKET SET - 12 POINT

- Proto® 12 Point Sockets are ideal for use on stubborn or damaged fasteners, and also on fasteners made from soft materials.
- The TorquePlus™ design is a high performance drive configuration which allows for quick and easy socket engagement to the fastener flats, not the corners.
- The TorquePlus™ configuration employs a radius-corner design, shifting contact area and stress away from the fastener corners and distributing contact stresses over a large area of the socket, minimizing slippage.
- The TorquePlus™ internal design minimizes fastener rounding, helps to extend fastener life, and allows the user to more easily turn worn, rounded, or rusted fasteners.
- Weight: 15.21 lbs.



50235

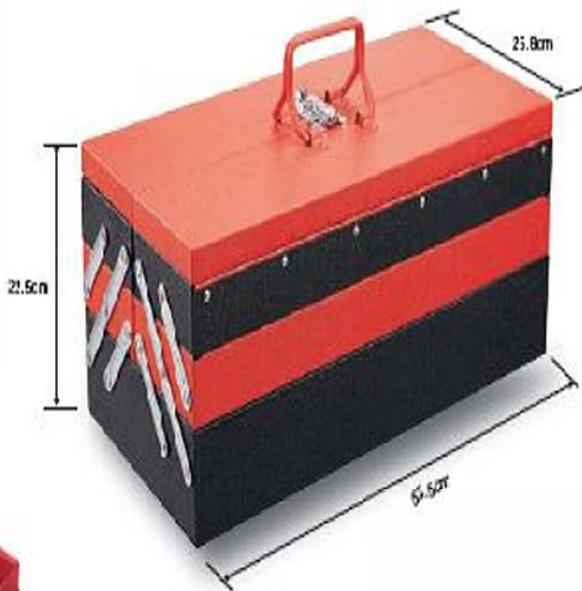

L53.5 x W25.8 x H22.5 cm
1p: 7.3kg (16.0lb)

50235-124(S&M)

1/17.9/18.0/17.9"



C5203



C5112



C21114



C3661



C5136

50235-101(M/M)

1/18.9/20.9/1.9"



C5153



C5142



C21114



C4482



C5136

3/8" DRIVE FLEX-HEAD RATCHET

- 180° flex.
- 5° ratcheting angle.
- Small head design and tight swing to allow access to fastener in a tight area.



Product ID No.	Overall Length	Weight lbs.	Repair Kit	ASME Spec.
J5257F	8-1/2"	0.86 lbs.	J5252FRK	ASME B107.10M

SET NO. J54128 - 1/2" DRIVE 27 PC. TOOL SET - 12 POINT

- Proto® 12 Point Sockets are ideal for use on stubborn or damaged fasteners, and also on fasteners made from soft materials.
- The TorquePlus™ design is a high performance drive configuration which allows for quick and easy socket engagement to the fastener flats, not the corners.
- The TorquePlus™ configuration employs a radius-corner design, shifting contact area and stress away from the fastener corners and distributing contact stresses over a large area of the socket, minimizing slippage.
- The TorquePlus™ internal design minimizes fastener rounding, helps to extend fastener life, and allows the user to more easily turn worn, rounded, or rusted fasteners.
- Weight: 19.09 lbs.



SET NO. J55106 - 3/4" DRIVE 42 PC. SOCKET SET - 12 & 6 POINT

- Proto® 12 and 6 Point Sockets are ideal for use on stubborn or damaged fasteners, and also on fasteners made from soft materials.
- The TorquePlus™ design is a high performance drive configuration which allows for quick and easy socket engagement to the fastener flats, not the corners.
- The TorquePlus™ configuration employs a radius-corner design, shifting contact area and stress away from the fastener corners and distributing contact stresses over a large area of the socket, minimizing slippage.
- The TorquePlus™ internal design minimizes fastener rounding, helps to extend fastener life, and allows the user to more easily turn worn, rounded, or rusted fasteners.
- Weight: 92.35 lbs





- 1/2" Surface drive socket 10; 11; 12; 13; 14; 15; 16; 17; 18; 19; 20; 21; 22; 24; 27; 30; 32 mm
- 1/2" Surface drive deepsocket (77mmL) 10; 11; 12; 13; 14; 15; 17; 19; 22 mm
- 5/16" bit (30mmL): Hex 4; 5; 6; 8; 10; 12; 14 mm
- 5/16" bit (30mmL): Star T20; T25; T27; T30; T40; T45; T50; T55
- 5/16" bit (30mmL): Slotted 8; 10; 12 mm
- 5/16" bit (30mmL): Phillips PH.1; PH.2; PH.3; PH.4
- 5/16" bit (30mmL): Pozidriv PZ.1; PZ.2; PZ.3; PZ.4
- 1/2" Ratchet handle
- 1/2" Sparkplug socket 16; 20.6 mm
- 1/2" Extension bar 5"; 10" (125; 250mm)
- 1/2" Universal joint
- Bit holder 1/2" DRx5/16"
- Adaptor for extension 3/8" (F)x1/2" (M)



51010T



10pc Star tamperproof grip key set

Part no.	6/9.3/10.8/1.3'	1540g
767 10G... 55G	Content: 10-Star tamperproof grip key T-10H; T-15H; T-20H; T-25H; T-27H; T-30H; T-40H; T-45H; T-50H; T-55H	

Black suitcase with 106pcs of tools

50234-107S




Part no.	Contents:
711 1N...2N	2-Insulated Phillips screwdriver PH.1; PH.2
713 03N...065N	4-Insulated slotted screwdriver 3; 4; 5.5; 6.5
7112S	1-Phillips stubby screwdriver PH.2
713065S	1-Slotted stubby screwdriver 6.5
711 1...3	3-Phillips screwdriver PH.1; PH.2; PH.3
6907250	1-Insulated water pump pliers (Curved jaw) 10"
649250A	1-Adjustable gauged wrench 250mmL
6904160	1-Insulated long nose pliers 6"
6903180	1-Insulated combination pliers 7"
6905160	1-Insulated diagonal cutting pliers 6"
6912160	1-Insulated wire stripper pliers 6"



1/12.7/13.7/1.65'

Cam pulley lock tool

905G11

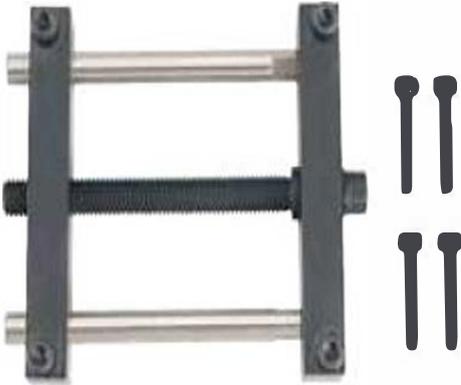

- Used on a fixed cam pulley, making replacement gears will not be so arbitrary rotation.
- Simple and fast assembly for labor-saving.
- Can use on majority part of type of cars.
- Adjust a variety of sizes to cope with different types of vehicles.



 24/23.0/24.0/1.4'

 970g

Camshaft locking tool

9G1201



ECOTEC suitable for 16V 1.8/2.0 liter engines.



 36/3.24/4.24/2.6'

 90g

Double open end wrench

754...



Part no.	Size	Over	Weight	
		mm	g	pc/box
7541315 	13x15	180	88.6	10
7541921S	3/4"x13/16"	236	196	5
7541922S	3/4"x7/8"	236	195	5
7542224S	7/8"x15/16"	246	232	5

3/4" 6pt. Flank socket

565...



Part no.	Size	Length	Weight	
		mm	g	pc/box
56517	17	50	158	2
56543	43	64	630	2
56544	44	66	650	2

Angle and flat double spoon

68351



- * Length: 510 mm
- * Width: 59mm
- * Head material: 1055 medium carbon steel
- * Head polished: mirror polished




8/19.4/20.4/1.2'



2425g

13pc Gear ring wrench & flare nut wrench set

T51315

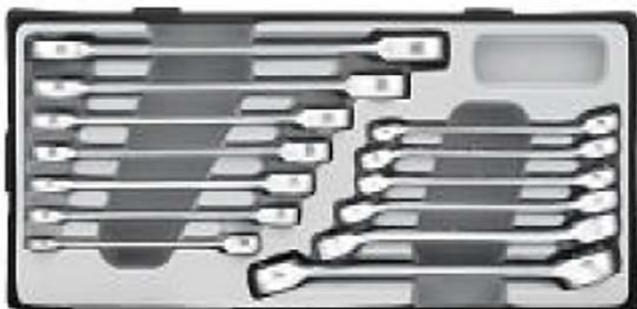

Part no.	Contents:
757 08...19	7-Ring flat gear wrench 8; 10; 12; 13; 14; 17; 19 mm
751 0810...1719	6-Flare nut wrench 8x10; 9x11; 10x12; 11x13; 12x14; 17x19mm

 6/12/13/0.78'

 2000g

6pc Hex ball point grip key set

T50637



Part no.	Contents:
765 02G...08G	6-Hex ball point grip key 2; 3; 4; 5; 6; 8 mm

 6/3.8/4.8/0.65'

 626g

Insulated diagonal cutting pliers

6905180



Part no.	Length	Packing	Weight
	mm	Q'ty/N.W/G.W/CUFT	g
6905180	180-7"	60/17/18/1.1'	282

Mini diagonal pliers

612140

NEW



Part no.	Length	Packing	Weight
	mm	Q'ty/N.W/G.W/CUFT	g
612140	118	120/9.2/10.2/2'	77

Mini nose pliers

610110

NEW




Part no.	Length	Packing	Weight
	mm	Q'ty/N.W/G.W/CUFT	g
610110	140	120/9.6/10.6/2.4'	80

Oil filter master pliers



639230



Part no.	Size mm	Packing mm	l mm	g
639230	53-118mm	40/19.5/20.5/1.7	230	480



STRAIGHT JAW LOCKING PLIERS

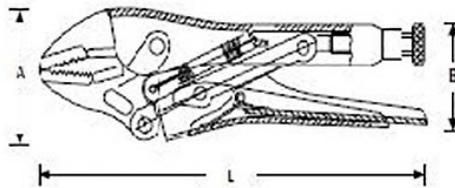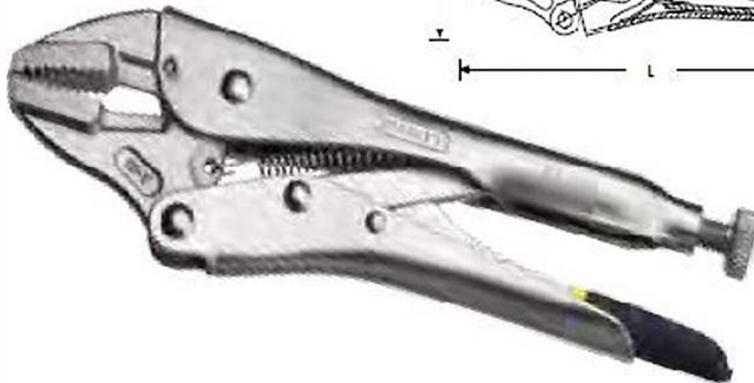

- Chrome plating is corrosion resistant
- Forged and machined jaws for maximum durability
- Screws adjust the jaws and the clamping pressure amount for precision
- Safety and ease when opening


TIN SNIPS



- Cuts up to 20 gauge (0.91mm) cold-rolled steel or 23 gauge (0.72mm) stainless-steel
- Durable fully-polished steel blades are forged to stay sharp for long cutting life
- Adjustment-free fastener prevents loosening of the blades
- Slip-resistant double cushion grip for comfort
- Meets or exceeds ANSI standards



DYNAGRIP™ LONG NOSE PLIERS

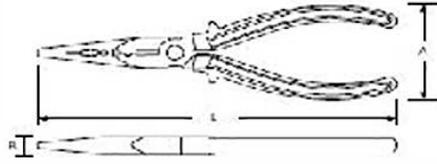


- Forged carbon steel jaws fully heat treated for optimum performance and durability
- Induction hardened cutting edges for greater reliability in cutting
- Bi-material soft grip handle provides excellent comfort
- Ergonomically designed DYNAGRIP™ handle with finger guards for better efficiency and handling



STHTB4031-6

BASIC DIAGONAL CUTTING PLIERS

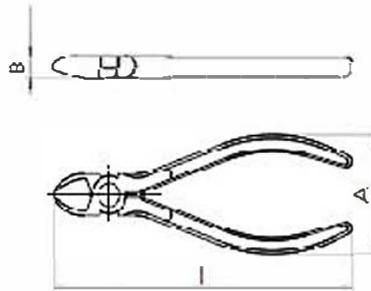


- Forged carbon steel jaws fully heat treated for optimum performance and durability
- Double dipped handle allows for a comfortable grip
- Drop-forged steel is strong and durable
- Meets ANSI specifications



4", 5" & 6"

7"


DYNAGRIP™ SLIP JOINT PLIERS

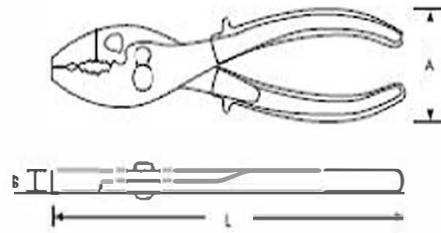

- Forged carbon steel jaws fully heat treated for optimum performance and durability
- Bi-material soft grip handle provides excellent comfort
- Ergonomically designed DYNAGRIP™ handle with finger guards for better efficiency and handling




DYNAGRIP™ FLAT NOSE PLIERS

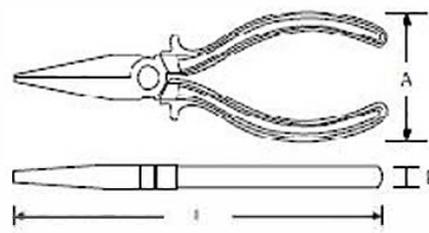

- Forged carbon steel jaws fully heat treated for optimum performance and durability
- Bi-material soft grip handle provides excellent comfort
- Ergonomically designed DYNAGRIP™ handle with finger guards for better efficiency and handling



DYNAGRIP™ END NIPPER PLIERS

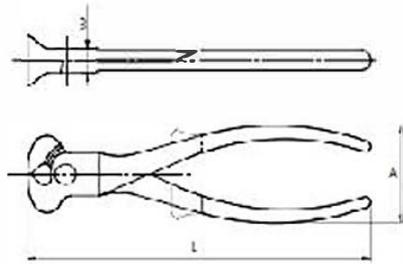

- Forged carbon steel jaws fully heat treated for optimum performance and durability
- Induction hardened cutting edges for greater reliability in cutting
- Bi material soft grip handle provides excellent comfort
- Ergonomically designed DYNAGRIP™ handle with finger guards for better efficiency and handling



TIN SNIPS




- Cuts up to 20 gauge (0.91mm) cold rolled steel or 23 gauge (0.72mm) stainless-steel
- Durable fully-polished steel blades are forged to stay sharp for long cutting life
- Adjustment-free fastener prevents loosening of the blades
- Slip-resistant double cushion grip for comfort
- Meets or exceeds ANSI standards

Oil filter master pliers

639230



Part no.	Size mm	Packing 	 mm	 g
639230	53-118mm	40/19.5/20.5/1.7"	230	480

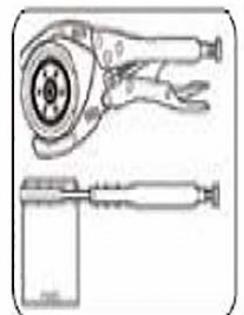

Mini diagonal pliers


612140

NEW



Part no.	Length	Packing	Weight
	mm	Q'ty/N.W./G.W./CUFT	g
612140	118	120/9.2/10.2/2'	77

CURVED JAW LOCKING PLIERS

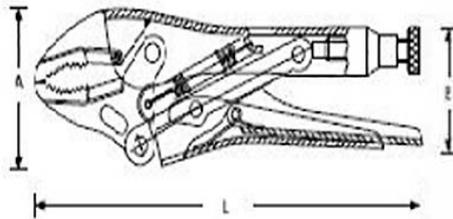

- Chrome plating is corrosion resistant
- Forged and machined jaws for maximum durability
- Screws adjust the jaws and the clamping pressure amount for precision
- Safety and ease when opening

Mini nose pliers

610110

NEW



Part no.	Length	Packing	Weight
	mm	Q'ty/N.W./G.W./CUFT	g
610110	140	120/9.6/10.6/2.4'	80

CHIPPING HAMMER

One point end and one chisel end with spring handle to prevent kickback..



Hoist YATO YT-0661

DESCRIPTION

YATO YT-0661 lifting
telescopic telescopic, weight 2.0 kg
Capture magnetic telescopic YT-0661
Adjustable length from 250 to 750 mm
Lifting weight 2.0 kg





FORCE



Swivel base bench vice



GLOBAL TAPE YELLOW BLADE TAPE RULES



- High-impact ABS case for durability
- Matt finish coating provides anti-glare readings
- Corrosion-resistant Tru-zero end hook for accurate measurements



TYLON™ TAPE RULES



- Tylon coated blade provides anti-glare readings
- Soft touch case
- Tru-Zero® hook for accurate internal and external measurements



OPEN REEL FIBERGLASS BLADE LONG TAPE RULES



- Double sided blade graphics for an easy read
- Corrosion-resistant Tru-zero folding end hook for accurate measurements
- Grip handle for comfortable portage



SKU #	Description	Blade length	Blade Width	Blade Material	Accuracy	Blade Print	Blade Color	Box Qty
STHT34791-8	30m/100' Metric/Imperial	30m/100'	1/2"	Fiberglass	11 (Metric)	2-sided	Yellow	2
STHT34794-8	60m/200' Metric/Imperial	60m/200'	1/2"	Fiberglass	11 (Metric)	2-sided	Yellow	2
34-777	100m/330' Metric/Imperial	100m/330'	1/2"	Fiberglass	11 (Metric)	2-sided	Yellow	2

FIBERGLASS BLADE LONG TAPE RULES



- High-impact case for durability
- Reinforced fiberglass blade for accurate measurements
- High visibility case make it easy to detect on the job



STEEL BLADE LONG TAPE RULES



- Polymer coated blade withstands abrasion
- Easy wind drum for efficient retraction
- Belt clip for hands free usage and convenient transportation



TOUGH CASE TAPE RULES

NEW
 100% Tough Case
 100% Tough Case
 100% Tough Case



- High visibility yellow blade
- Bi-material case provide comfortable, anti-slip grip
- Triangle shape offers improved stability
- Ergonomic 45° tilt clip for easy belt hook-on



Measuring tape 100M

5096P8100



Part no.	Size m
5096P8100	100

 10/15/17/2.6'

 1306g

Measuring tape

5096A8...



NEW

Part no.	Size	Weight	Packing
		g	Q'ty/N.W./G.W./CUFT
5096A815	15	257	30/8/9/2.2'
5096A830	30	425	30/13/14/2.2'
5096A850	50	900	20/18/19/2.8'

Tape Measures

Compact, quick return tapes with blade lock for accurate measurement

Part No.	Description	ex vat
HN00003	5M Tape	£4.55
HN00004	8M Tape	£7.55



Auto-stop measuring tape

5096A8...



Part no.	Specification	Packing
5096A803	3m	48/6.2/7.2/2.35'
5096A805	5m	48/12/14.5/2.35'
5096A808	8m	48/23/23.5/2.35'



STANLEY[®]

CLASSIC BOX-BEAM LEVEL

The STANLEY[®] CLASSIC BOX-BEAM features a wide range of levels that come in various sizes. New features offer better visibility, readability, durability and accuracy.


SOFT MATERIAL
used to make shock-absorbing end caps

EXCELLENT ACCURACY

center vial with 0.05mm/1m

2 PLUMB VIALS

for easy readability

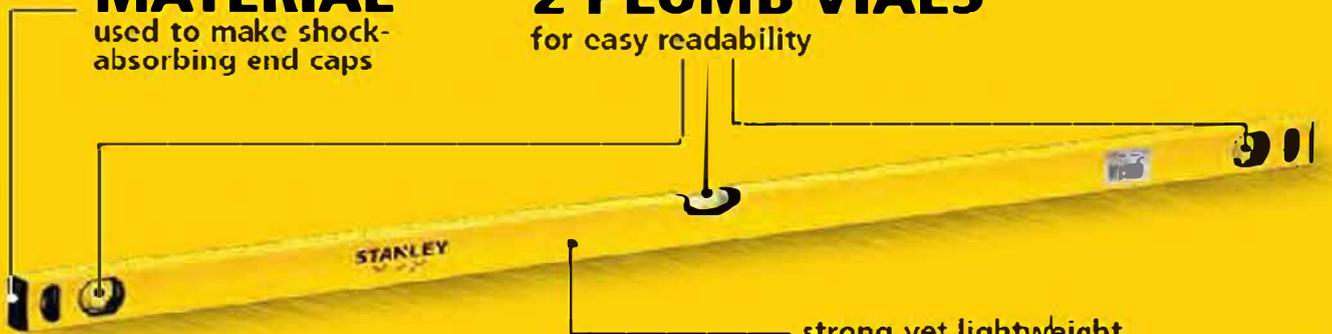

strong yet lightweight

ALUMINUM FRAME
suitable for all-purpose durability

MILLING SURFACE

to provide better accurate measurement



USER TIPS

- The hang-hole allows for easy storage
- Measuring can be done from either direction, offering excellent accuracy

STANLEY[®] LEVELS

Box Beam Levels

- Center block vial for durability and accuracy of 0.0005"/in
- Large, 12mm plumb tubular vials for accuracy of 0.001"/in
- MaxEdge™ bridged center vial for continuous marking edge and durability
- Shock absorbing end caps for durability and long life



SKU #	TYPE	MAGNETIC	HAND GRIPS	LENGTH		BOX QTY	CTN QTY	UPC
STHT42496	Box Beam	N	1	24 in	610 mm	—	3	076174424966
STHT42497	Box Beam	Y	1	24 in	610 mm	—	3	076174424973
STHT42504	Box Beam	N	2	48 in	1219 mm	—	3	076174425048
STHT42505	Box Beam	Y	2	48 in	1219 mm	—	3	076174425055
STHT42507	Box Beam	N	1	36 in	90 cm	—	3	076174425079
STHT42508	Box Beam	Y	1	36 in	90 cm	—	3	076174425086
STHT42506	Box Beam	N	2	72 in	180 cm	—	3	076174425062



Combination Square

- Die cast metal handle with brass hardware for durability
- Etched stainless steel blades for corrosion resistance
- Built-in scriber for easy surface marking

SKU #	TYPE	LENGTH		WIDTH		GRADUATION	BOX QTY	CTN QTY	UPC
46-131	English	16 in	406 mm	1 in	25 mm	1/32", 1/16", 1/8"	—	3	076174463231
46-123	English	12 in	305 mm	1 in	25 mm	1/32", 1/16", 1/8"	—	3	076174461237



12" Combination Square

- Die-cast metal handle for durability
- Embossed hard chrome blade is coated for corrosion resistance
- 360° vial for visibility

STANLEY® STEEL CARPENTER SQUARE



- Tempered steel designed for durability
- Deep graduations for easy reading on face and back
- Surface protected with a clear finish that resists rust
- Reverse reading scale makes measuring more efficient

TRY SQUARE ZINC HANDLE

- Metric / Imperial marking on ruler
- Cast zinc handle



SKU	BLADE	HANDLE
E-46530	150mm - 6"	124mm - 4-7/8"
E-46532	200mm - 8"	124mm - 4-7/8"
E-46534	250mm - 10"	184mm - 7-1/4"
E-46536	300mm - 12"	184mm - 7-1/4"

DLR130K Laser Distance Measurer



INTERIOR **130'**

- ▶ Measures distance up to 130 ft. with up to 1/16" accuracy
- ▶ Four Measurement Modes—Length, area, volume and continuous for maximum versatility
- ▶ Two Measuring Reference Points—Front and back
- ▶ Four Measurement Systems—Inches, feet and inches, decimal feet and metric

Includes:



- Hand Strap
- (4) AAA Batteries
- Belt Pouch

Specifications	
Accuracy (up to)	±1/16"
Range (up to)	2"– 130 ft.
Laser Diode	Class 2, 630–670 nm
Measuring Time, Typical/Max.	<0.5 sec./4 sec.
Illuminated Display	No
Integrated Viewfinder	No
Power	(4) AAA batteries
Operating Temperature	14°– 122° F
Dimensions	4.0" x 2.3" x 1.3"
Weight	0.4 lbs.

GTAS

FORCE Professional Tools

■ **10517**

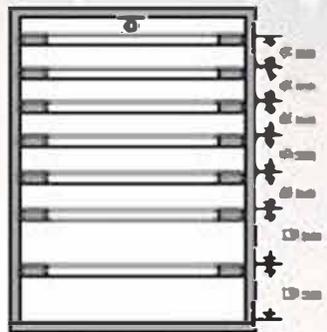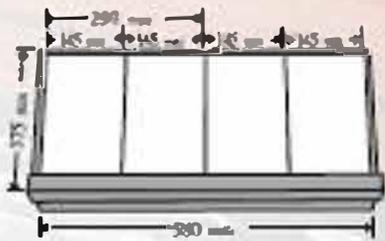


L69 x W46,5 x H98 cm



GTAS



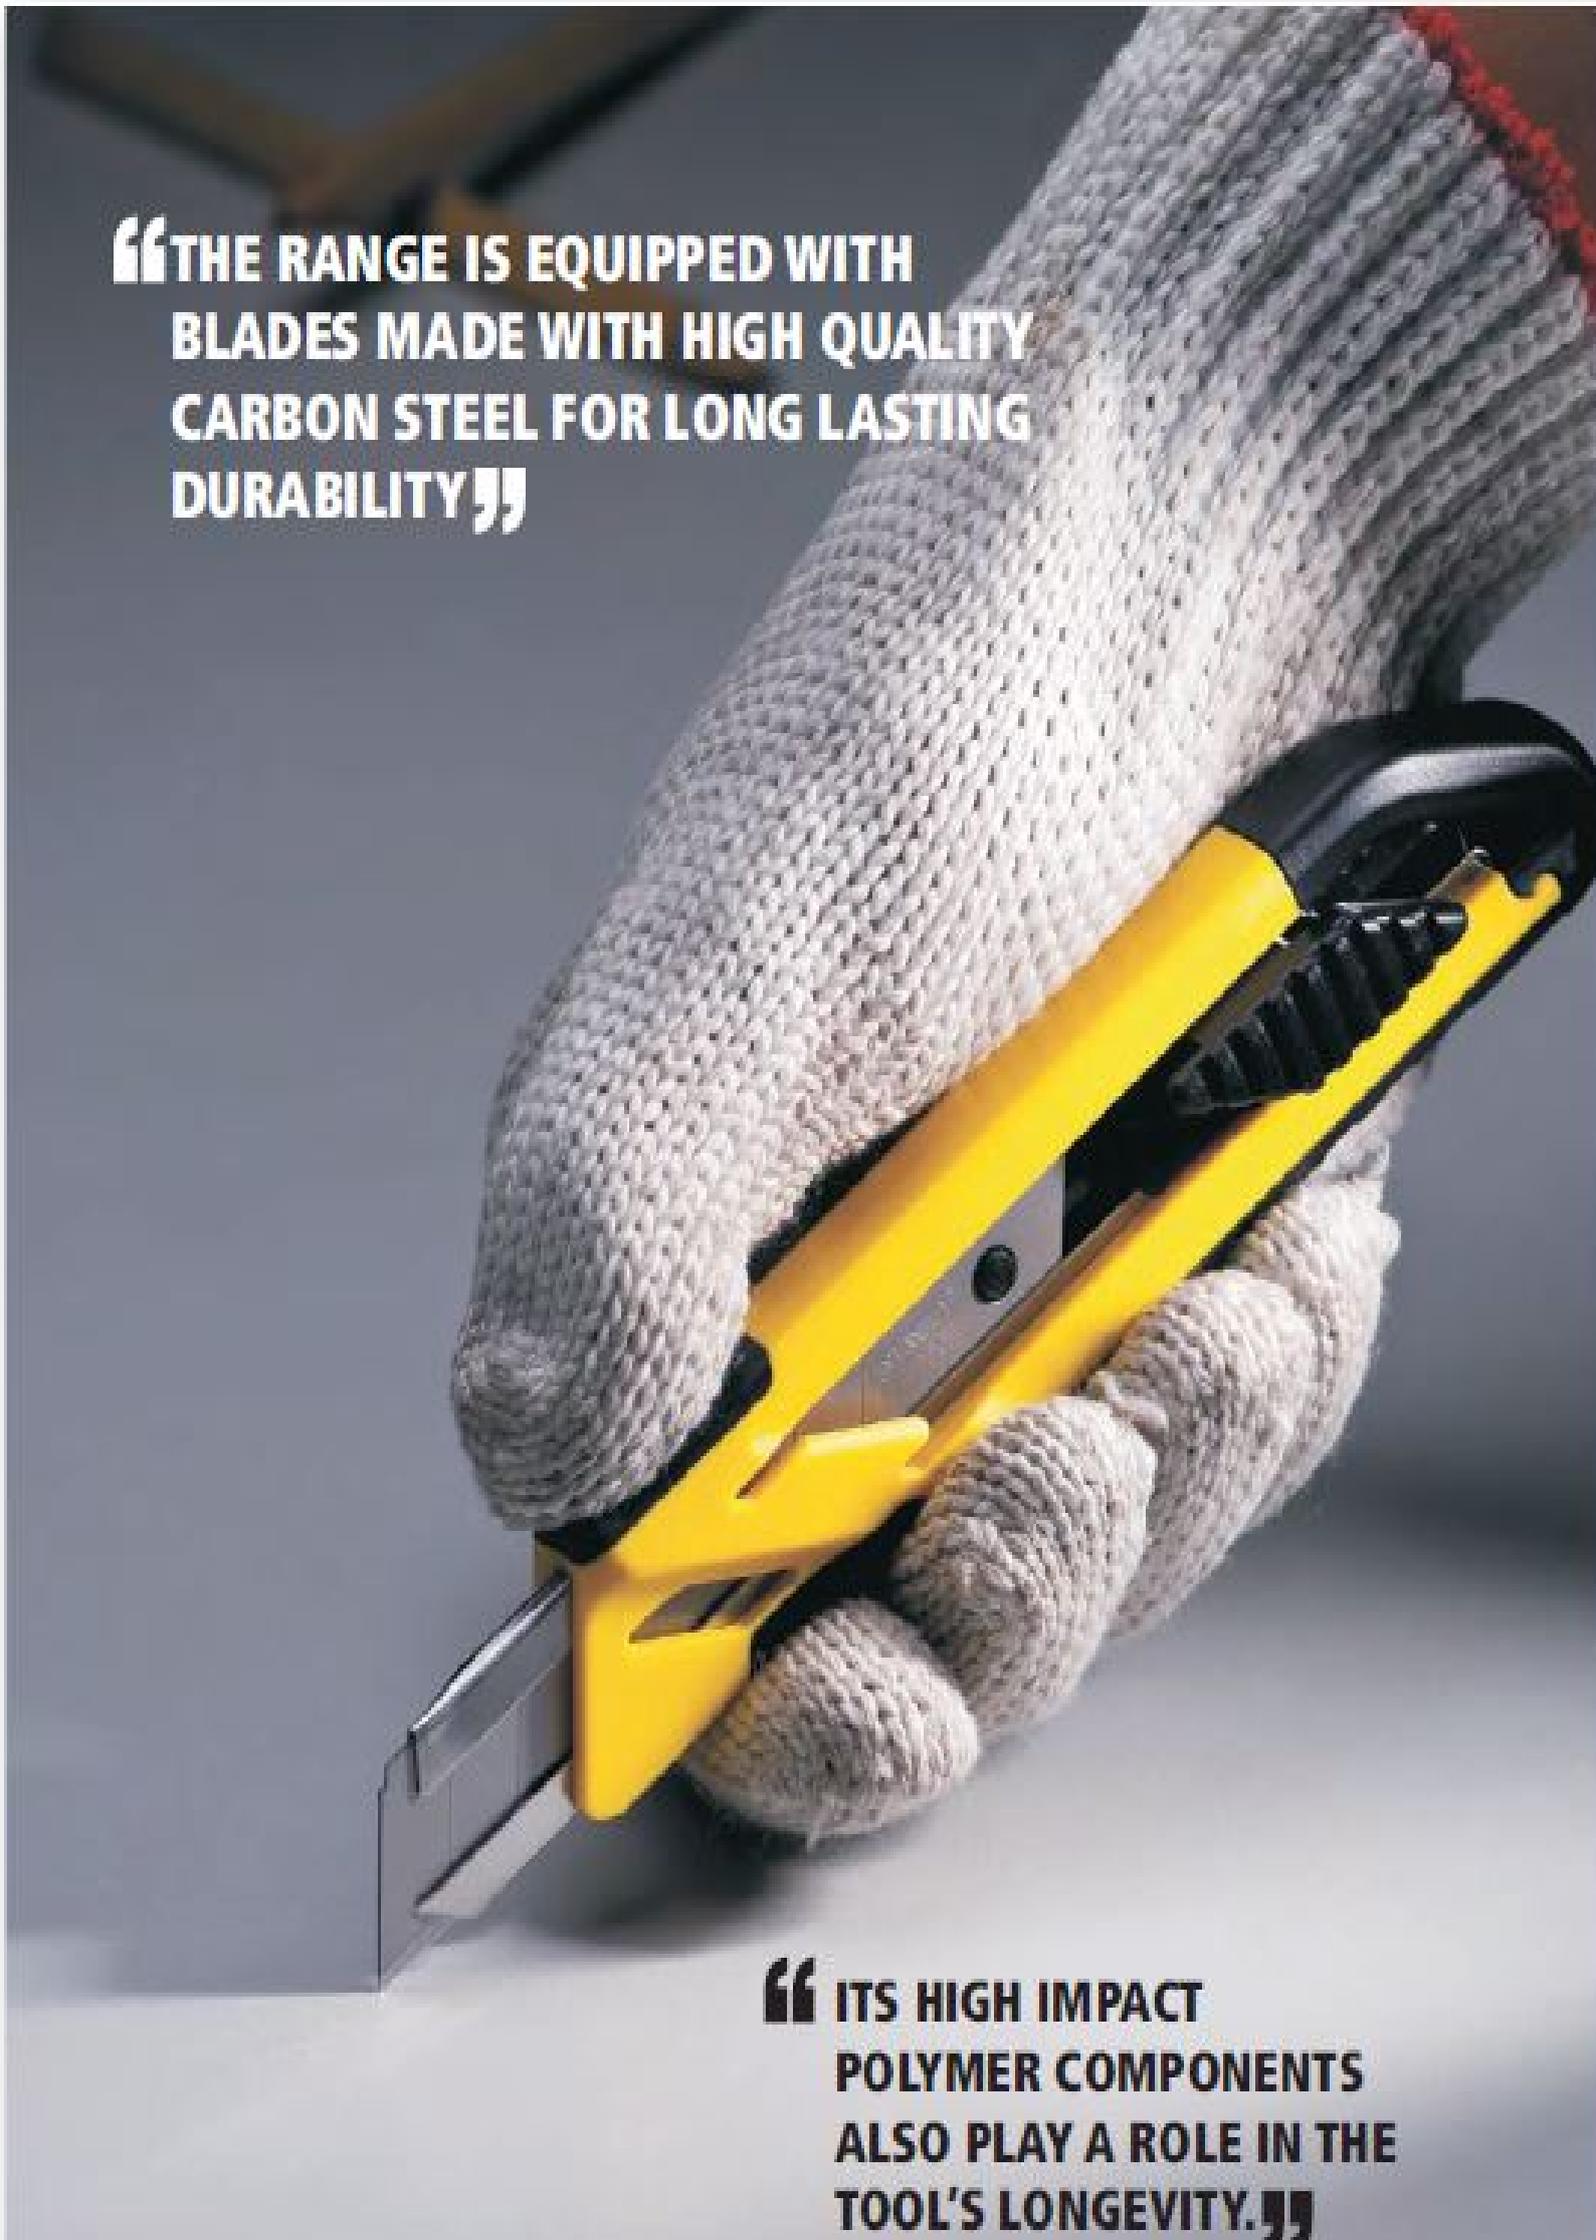

**“THE RANGE IS EQUIPPED WITH
BLADES MADE WITH HIGH QUALITY
CARBON STEEL FOR LONG LASTING
DURABILITY.”**

**“ITS HIGH IMPACT
POLYMER COMPONENTS
ALSO PLAY A ROLE IN THE
TOOL'S LONGEVITY.”**

GTAS

PROFESSIONAL 9MM SNAP-OFF KNIFE



- Ergonomic design of thumb pad and neck down create comfortable grip and control
- Bi-material TPR handle with soft grip or full ABS version for durability
- Fits application needs from light to heavy duty and specially designed to improve cutting performance
- Removable blade snapper in the knife cap

PROFESSIONAL INTERLOCK™ KNIFE



- Ideal for heavy duty cutting
- Metal construction for long life
- Ability to open and clean the knife
- Captive wheel lock for heavy duty damping



CLASSIC 199® FIXED BLADE UTILITY KNIFE



- Nose overlaps at top and bottom for added strength
- Cast metal textured handle designed for long and tough use
- Works with all STANLEY® replacement utility blades

BASIC SNAP-OFF KNIFE



- Lightweight and economical snap-off blade knife
- Works with most light-weight applications
- Tips in use can be removed with the snapper at the end-cap of the knife
- Pocket clip included on the 9mm (10-131) Snap-Off Knife

RETRACTABLE UTILITY KNIFE



- Lightweight, economical utility knife
- Three-positioned retractable blade
- Interlocking overlap nose secures blade safely between knife halves



STANLEY CLASSIC 99®



- The one and only Original STANLEY®
- Interlock® nose firmly secures the blade into the knife



GTAS

Aluminum pipe wrench

684...A



Part no.	 packing	<i>l</i> Length	 g
68410A	24/11.0/12.0/0.4'	250-10"	460
68412A	24/17.0/18.0/0.4'	300-12"	700
68414A	24/21.5/22.5/0.5'	355-14"	895
68418A	12/18.0/19.0/0.9'	455-18"	1500
68424A	6/14.0/15.0/0.7'	610-24"	2330
68436A	3/14.0/15.0/1.1'	863-36"	4660
68448A	2/13.0/14.0/1.0'	1220-48"	6500

Pipe wrench

684



Part no.	 packing	<i>l</i> Length	 g
68408	36/14.0/15.0/0.4'	200-8"	390
68410	24/17.0/18.0/0.4'	250-10"	710
68412	24/23.0/24.0/0.5'	300-12"	960
68414	12/16.0/17.0/0.4'	355-14"	1340
68418	12/25.0/26.0/0.6'	455-18"	2090
68424	6/22.0/23.0/0.7'	610-24"	3670
68436	3/25.0/26.0/1.1'	863-36"	8340
68448	2/24.0/25.0/1.0'	1220-48"	12000



PIPE TOOLS - HEAVY DUTY PIPE WRENCH (CAST IRON)



PART No.	DESCRIPTION	WT.(GM)	O/A LEN	MAX. JAW OPENING	SIZE	PBQ	SBO	Rs. EACH
87-E20-23	PIPE WRENCH	0.225	140mm	25mm	150mm/5	6	72	232
87-E21-23	PIPE WRENCH	0.38	185mm	34mm	200mm/8	6	35	342
87-E22-23	PIPE WRENCH	0.81	243mm	45mm	250mm/10	6	24	425
87-E23-23	PIPE WRENCH	1.41	297mm	55mm	300mm/12	6	12	534
87-E24-23	PIPE WRENCH	1.4	332mm	65mm	350mm/14	6	12	758
87-E25-23	PIPE WRENCH	2.38	414mm	80mm	450mm/18	6	12	1,110
87-E26-23	PIPE WRENCH	3.83	553mm	95mm	600mm/24	2	8	1,755
87-E27-23	PIPE WRENCH	7.88	805mm	140mm	900mm/36	1	4	3,342

Ratchet tube cutter

656




Part no.	mm	packing	g
65631	8-28	36/16.5/17.5/2.14	460
65632	28-67	12/13/13.5/0.84	1080

*Quick and easy ratchet mechanism make it easy and comfortable to use even in narrow spaces.

*Pipe thickness up to 3mm.

GTAS

6 PCS CUSHION GRIP™ SCREWDRIVER SET WITH BONUS (TESTER INCLUDED)




- Phillips® PH1 x 100mm
- Phillips® PH2 x 45mm
- Phillips® PH2 x 100mm
- Slotted 5mm x 100mm
- Slotted 6.5mm x 45mm
- Slotted 6.5mm x 100mm



SKU #	Description	Box Qty
STHT192002-8	6 PCS Cushion Grip™ Screwdriver Set with Bonus (Tester Included)	12

6 PCS CUSHION GRIP™ SCREWDRIVER SET



- Phillips® PH1 x 100mm
- Phillips® PH2 x 150mm
- Std Parallel 5mm x 100mm
- Std Parallel 5mm x 150mm
- Slotted 6.5mm x 150mm
- Slotted 5mm x 100mm



SKU #	Description	Box Qty
STHT65242-8	6 PCS Cushion Grip™ Screwdriver Set	12

6.3MM PHILLIPS® HEADS



- Economical double ended tips
- Ideal for screwing
- Tempered for durability

SKU #	Description	Tip Size	Length (mm)	Box Qty
63-101T-23	PH1-PH1 X 65mm	PH1-PH1	65	10
63-102T-23	PH2-PH2 X 65mm	PH2-PH2	65	10
63-103T-23	PH3-PH3 X 65mm	PH3-PH3	65	10

GTAS

7 PCS VDE SCREWDRIVER SET

-  3.0 x 100mm
 4.0 x 100mm
 5.5 x 125mm
 6.5 x 150mm
-  3.0 x 70mm
-  PH1 x 80mm
 PH2 x 100mm




- Insulation directly injection-moulded around the blade
- Ergonomic, shock resistant, anti slip handle and for greater torque to be applied with less effort
- Each screwdriver is individually tested to 10,000V in a water bath for 10 SCFA



SKU #	Description
STHT65980-8	7 PCS VDE Screwdriver Set

PVC HANDLE SLOTTED FLARED

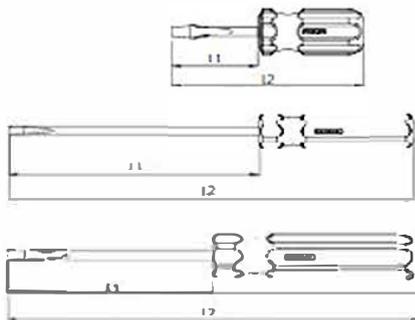

- Comfortable handle
- Chrome plated Cr V bar resists corrosion
- Magnetic tips for secure grip on fasteners
- Color coordinated handles: red (standard), blue (Phillips®), black (Torx)



VDE SCREWDRIVER SLOTTED FLARED







- Insulation directly injection moulded around the blade
- Ergonomic, shock resistant, anti slip handle and for greater torque to be applied with less effort
- Each screwdriver is individually tested to 10,000V in a water bath for 10 SCFA

SKU #	Description	Tip Size	L1 (mm)	Length (mm)	Box Qty
STHT65966-8	VDE Screwdriver Standard 3.0x100mm	3.0	100	200	12
STHT65967-8	VDE Screwdriver Standard 4.0x100mm	4.0	100	200	12
STHT65968-8	VDE Screwdriver Standard 5.5x125mm	5.5	125	235	12
STHT65969-8	VDE Screwdriver Standard 6.5x150mm	6.5	150	265	12
STHT65970-8	VDE Screwdriver Standard 8.0x175mm	8.0	175	300	12
STHT65971-8	VDE Screwdriver Standard 10.0x200mm	10	200	325	12

GTAS



CUSHION GRIP™ PHILLIPS®

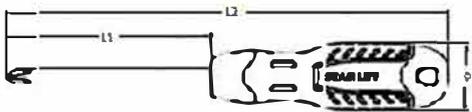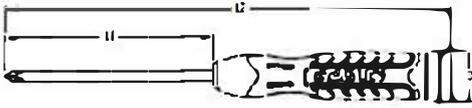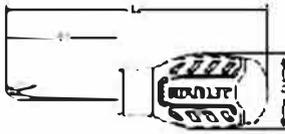

- Bi-material (PP+TPR) soft grip handle providing excellent comfort
- Chrome Vanadium (Cr-V) blade for durability
- Magnetic tips for easy pick up and screw locator
- Three-sided handle allowing more torque with anti-slip and anti-rolling features reducing handle slippage
- Ergonomic design with finger point in neck-down area for precise control
- Built-in hang hole for easy storage
- Screw tip identification on the handle for organization



CUSHION GRIP™ SLOTTED FLARED

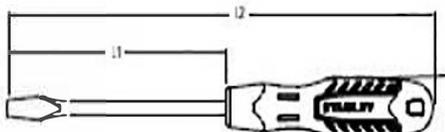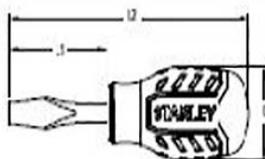

- Bi-material (PP+TPR) soft grip handle providing excellent comfort
- Chrome Vanadium (Cr-V) blade for durability
- Magnetic tips for easy pick up and screw locator
- Three-sided handle allowing more torque with anti-slip and anti-rolling features reducing handle slippage
- Ergonomic design with finger point in neck-down area for precise control
- Built-in hang hole for easy storage
- Screw tip identification on the handle for organization

GTAS

1Pcs Car Lift Hydraulic Jack Automotive Lifter Vehicle Bottle Jack Repair Tool 2T / 3T / 5T Capacity Optional

Description:

with proper and regular maintenance, this hydraulic jack can be used for a long time without leaking. turning screw up when height is not enough use the right, not edge-up or upside-down.

characteristics:

- enlarged base ensures stable and safe use.
- oil return valves operation is simple, convenient and fast.
- whole body casting, thickened steel plate.
- use for a long time and do not leak.
- skidding lines on the top

Specifications:

Max Lifting Capacity: 2 T

Min Height: $\leq 148\text{mm} / 5.82''$

Lifting Height: $\geq 80\text{mm} / 3.14''$

pass Height: $\geq 50\text{mm} / 1.96''$

weight: 1.96 kg (approximately)

Max Lifting Capacity: 3 T

Min Height: $\leq 180\text{mm} / 7.08''$

Lifting Height: $\geq 100\text{mm} / 3.93''$

pass Height: $\geq 50\text{mm} / 1.96''$

weight: 2.61 kg (approximately)

Max Lifting Capacity: 5 T

Min Height: $\leq 185\text{mm} / 7.28''$

Lifting Height: $\geq 110\text{mm} / 4.33''$

pass Height: $\geq 60\text{mm} / 2.36''$

weight: 3.44 kg (approximately)



GTAS

Jack stands

9U39...



- These models incorporate a lever and ratchet assembly for adjusting the height.
- Same as Model 9U3902 but these models are newly designed with rubber pads which can prevent the auto body from damage.

Part No.	Capacity (ton)	Height range (mm)	Base Size (mm)	Packing	g
9U3901	3 ton	270-420	177 x 194	1/6.0/6.6/0.66'	6000
9U3902	3 ton	290-440	177 x 194	1/6.6/7.2/0.66'	6600



SPECIFICATIONS

Brand

Aton

Hand tools Type

Hand Jacks

Item EAN

2724304893271


DESCRIPTION:

PRODUCT FEATURES :

- Collapsible handle for easy storage, operation and maintenance
- Top quality steel structure makes high safety and durability
- Fast lift speed makes it work more sufficiently
- Sensitive brake system, safe and reliable
- All jacks are tested with 25% overload
- Equipped with fixed claw
- Size : 5 T
- Color : Blue
- Model Number : 302105
- Dimensions : 610 x 130 x 90mm




GTAS

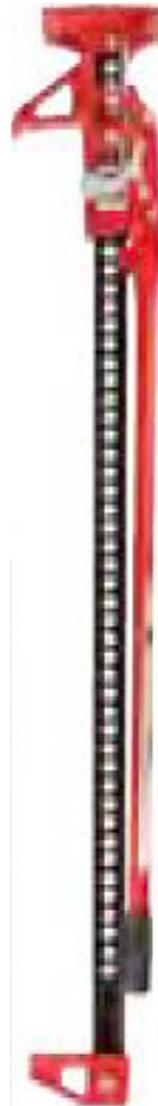

1200mm Off Road Jack

154 - 1070mm height, 3 ton maximum load, 14kg weight
TOOT2808

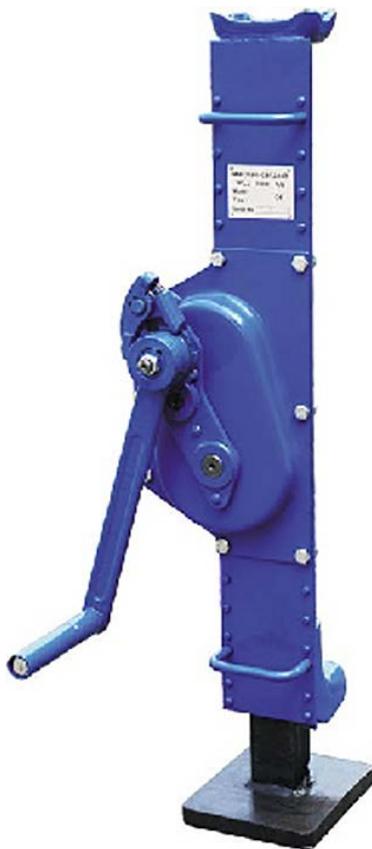

1500mm Off Road Jack

154mm
1350mm height, 3 ton maximum load, 15kg weight
TOOT2809





GTAS

RBU = Shank mounted wheel brushes, crimped

POS RBU 3006/6 ST 0,20	531808	28	
POS RBU 5015/6 ST 0,20	531822	28	
POS RBU 7015/6 ST 0,30	894606	28	
POS RBU 10010/6 ST 0,30	894613	28	
POS RBU 3006/6 INOX 0,20	531884	28	
POS RBU 5015/6 INOX 0,20	531891	28	
POS RBU 7015/6 INOX 0,30	894620	28	
POS RBU 10010/6 INOX 0,30	894637	28	
POS RBU 5015/6 SiC 180 0,90	531945	28	
POS RBU 7015/6 SiC 180 0,90	894644	29	

RBG = Shank mounted wheel brushes, knotted


POS RBG 7006/6 ST 0,35	531969	29	
POS RBG 7006/6 ST 0,50	894569	29	
POS RBG 7006/6 INOX 0,35	531976	29	
POS RBG 7006/6 INOX 0,50	894576	29	

TBU = Shank mounted cup brushes, crimped

POS TBU 5010/6 ST 0,30	532171	31	
POS TBU 5010/6 INOX 0,30	894651	31	
POS TBU 5010/6 SiC 180 0,90	894668	31	

GTAS

RBGIT = Wheel brushes, knotted
 RBGIT PIPE = Wheel brushes, knotted,
 pipeline
 CT = COMBITWIST® type



Shoe Handles,
 Narrow Face



ECP 83556

GB Steel wire brush



GTAS

Palm-coated work gloves are a cost-effective alternative to leather, but they have a few more benefits. This blog looks at some of those benefits and provides glove suggestions.



GTAS

Golden Welding Gloves with Piping (Heavy Duty)

1



GTAS

Drilling/ Fastening



Drywall Screwdrivers
Screwdrivers

GTAS

15pc 1/2" Impact wrench socket set

4142-9



Part no.

445 10...24

8254S

8044125MPB

80541MPB

809QC

638M

Contents: 1/2"DR.

10-Impact socket

10; 11; 12; 13; 14; 17; 19; 21; 22; 24 mm

1-Impact wrench

1-Impact extension 125mmL

1-Impact universal joint

1-Quick connector (20MP)

1-Mini oiler



4/19.3/20.3/1.2'



4825g

18V COMPACT COMBI & BRUSHLESS IMPACT DRIVER KIT

DCK285M2B

DCE785 2 Speed Combi

DCF895 Brushless Impact Driver

2 x 4.0Ah Batteries

Multi-Voltage Charger

DS150 TOUGHSYSTEM™ Kit Box



TOUGHSYSTEM™

TOUGHSYSTEM™

BRUSHLESS

18
VOLT

4.0
AH

2



Also available as rcn-brushless version - DCK285M2

GTAS

**18
VOLT**

DC927KL

**Patented 3-Speed
All-Metal Transmission**

Maximizes the speed to the application for optimal performance

Heavy-Duty 1/2" Self-Tightening Chuck

Chuck tightens throughout operation providing superior bit gripping torque

Maximum Durability and Reliability

Built to withstand the job-site environment and the most demanding applications

18V High Performance Battery Pack

Provides long run-time and battery life

DEWALT Built High Power, High Efficiency Motor with Electric Brake
Delivers maximum performance in all drilling and fastening applications

Anti-Slip Comfort Grip
Provides increased comfort and control



GSA 12 V-LI (Solo)** Cordless Sabre Saw (0 601 64L 9L2)



Capacity

Stroke speed	: 0 - 3,000 min
Stroke Length	: 14.5 mm
Pipe Diameter	: 50 mm
Wood	: 65 mm

Drill

64

6413 10mm (3/8") Compact and lightweight, yet with enough power.

- Ergonomically designed handle with rubberized grip provides more control and comfort.
- Chuck capacity: 1.5-10mm (1/16"-3/8").
- In-line design brings drilling pressure in line with center of drill bit axis.
- All ball bearing construction ensures high durability.



Continuous rating Input	450W
Capacity	Steel : 10mm (3/8") Wood : 25mm (1")
No load speed (rpm)	0-3,000
Dimensions (L x W x H)	234 x 64 x 183mm (9-1/4" x 2-1/2" x 7-1/4")
Net weight	1.2kg (2.6lbs)
Power supply cord	2.0m (6.6ft)


GTAS

YATO

CORDLESS DRILL - 10.8V YT 82851



10.8 V	Li-ion	1h QUICK CHARGING SZYBKA ŁADOWNIE	
24 Nm			
	SPINDLE BRAKE		
0-350 min ⁻¹ 0-1300 min ⁻¹			
10 mm			

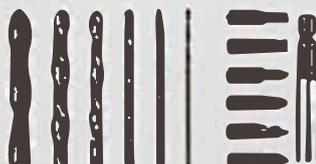

GTAS

Single Speed Impact Drills



New Compact Generation

Easy

Universal

Expert

The "Easy" line offers small and light-weight drills ideal for smaller projects.

Drill

64

6413 10mm (3/8") **Compact and lightweight, yet with enough power.**

- Ergonomically designed handle with rubberized grip provides more control and comfort.
- Chuck capacity: 1.5-10mm (1/16"-3/8").
- In-line design brings drilling pressure in line with center of drill bit axis.
- All ball bearing construction ensures high durability.



Continuous rating Input	450W
Capacity	Steel : 10mm (3/8") Wood : 25mm (1")
No load speed (rpm)	0-3,000
Dimensions (L x W x H)	234 x 64 x 183mm (9-1/4" x 2-1/2" x 7-1/4")
Net weight	1.2kg (2.6lbs)
Power supply cord	2.0m (6.6ft)



5" ANGLE GRINDER

9565CV

1GUA6

Variable Speed



SJS - Super Joint System Helps Prevent Gear Damage

- Electronic limiter prevents motor burnout
- Electronic speed control maintains desired speed under load
- Soft start feature for smooth start-ups
- Variable speed (2,800-10,500 RPM) to match speed to desired application; lock-on feature
- Labyrinth construction seals motor and bearings from contamination

MODEL 9565CV INCLUDES: 5" Grinding wheel (741407-B), Lock nut wrench (782412-6), Side handle (152490-4), Lock nut (193465-4), Inner flange (224378-9), Wheel guard (135108-2)

115MM & 125MM GRINDERS

CAT. NO.	DESCRIPTION
D28065	125mm 1250 watts with Dust Ejection System
DW831	125mm 1400 watts
D28117	115mm 1100 watts low vibration



D28065

4" Angle Grinder

GWS 750-100

(0 601 394 0L0)

HEAVY DUTY



1 619 P11 715



Capacity

Power Input	: 750 W
No-load Speed	: 11,000 rpm
Disc Diameter	: 100 mm
Grip Size	: 59 / 54.5 mm
Perimeter	: 187 mm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.8 kg

230MM GRINDERS

CAT. NO.	DESCRIPTION
D28415	2200 watts Low Vibration
D28490	2000 watts
D28492K	2200 watts



D28415

GTAS

Grinding Sanding

Angle Grinder

204

GA9020 230mm (9") Outstanding durability.

- Increased heat resistance.
- Superior anti-dust structure.
- Machined bevel gear for strength.
- Soft grip for more comfort and control.
- Gear housing can be positioned at every 90 degrees.

Continuous rating Inp01200W

Capacity Depressed center wheel
: 230mm (9")

Wire cup brush
: 110mm (4-3/8")

Cut-off wheel : 230mm (9")

No load speed (rpm) 6,600

Dimensions 473 x 249 x 140mm
(L x W x H) (18-5/8" x 9-3/4" x 5-1/2")

Net weight 4.7kg (10.4lbs)

Power supply cord 2.5m (8.2ft)



115MM GRINDER

D28113K

Power Input 900 watts

No Load Speed 10000 rpm

Max. Disc Diameter 115 mm

Weight 2.1 kg



Diamond Cutting / Grinding / Polishing Accessories




Makita[®]

230X22.23
CONCRETE

MAX 6640min⁻¹
MAX 80M/sec

50403

A-84137



Sawing Accessories



System Accessories



optiline
WOOD

Top performance in wood.
The optimum blade for cutting
results and service life.



speedline
WOOD

Fast rip and cross cuts in
all types of wood.
For a fast and coarse cut.



MULTI
MATERIAL


Clean through different
materials.
A circular saw blade for all
applications.




CONSTRUCT
WOOD

Robust in construction site
timber.
For coarse wood on construc-
tion sites. Also cuts through
nails and concrete residues.

Sawing Accessories

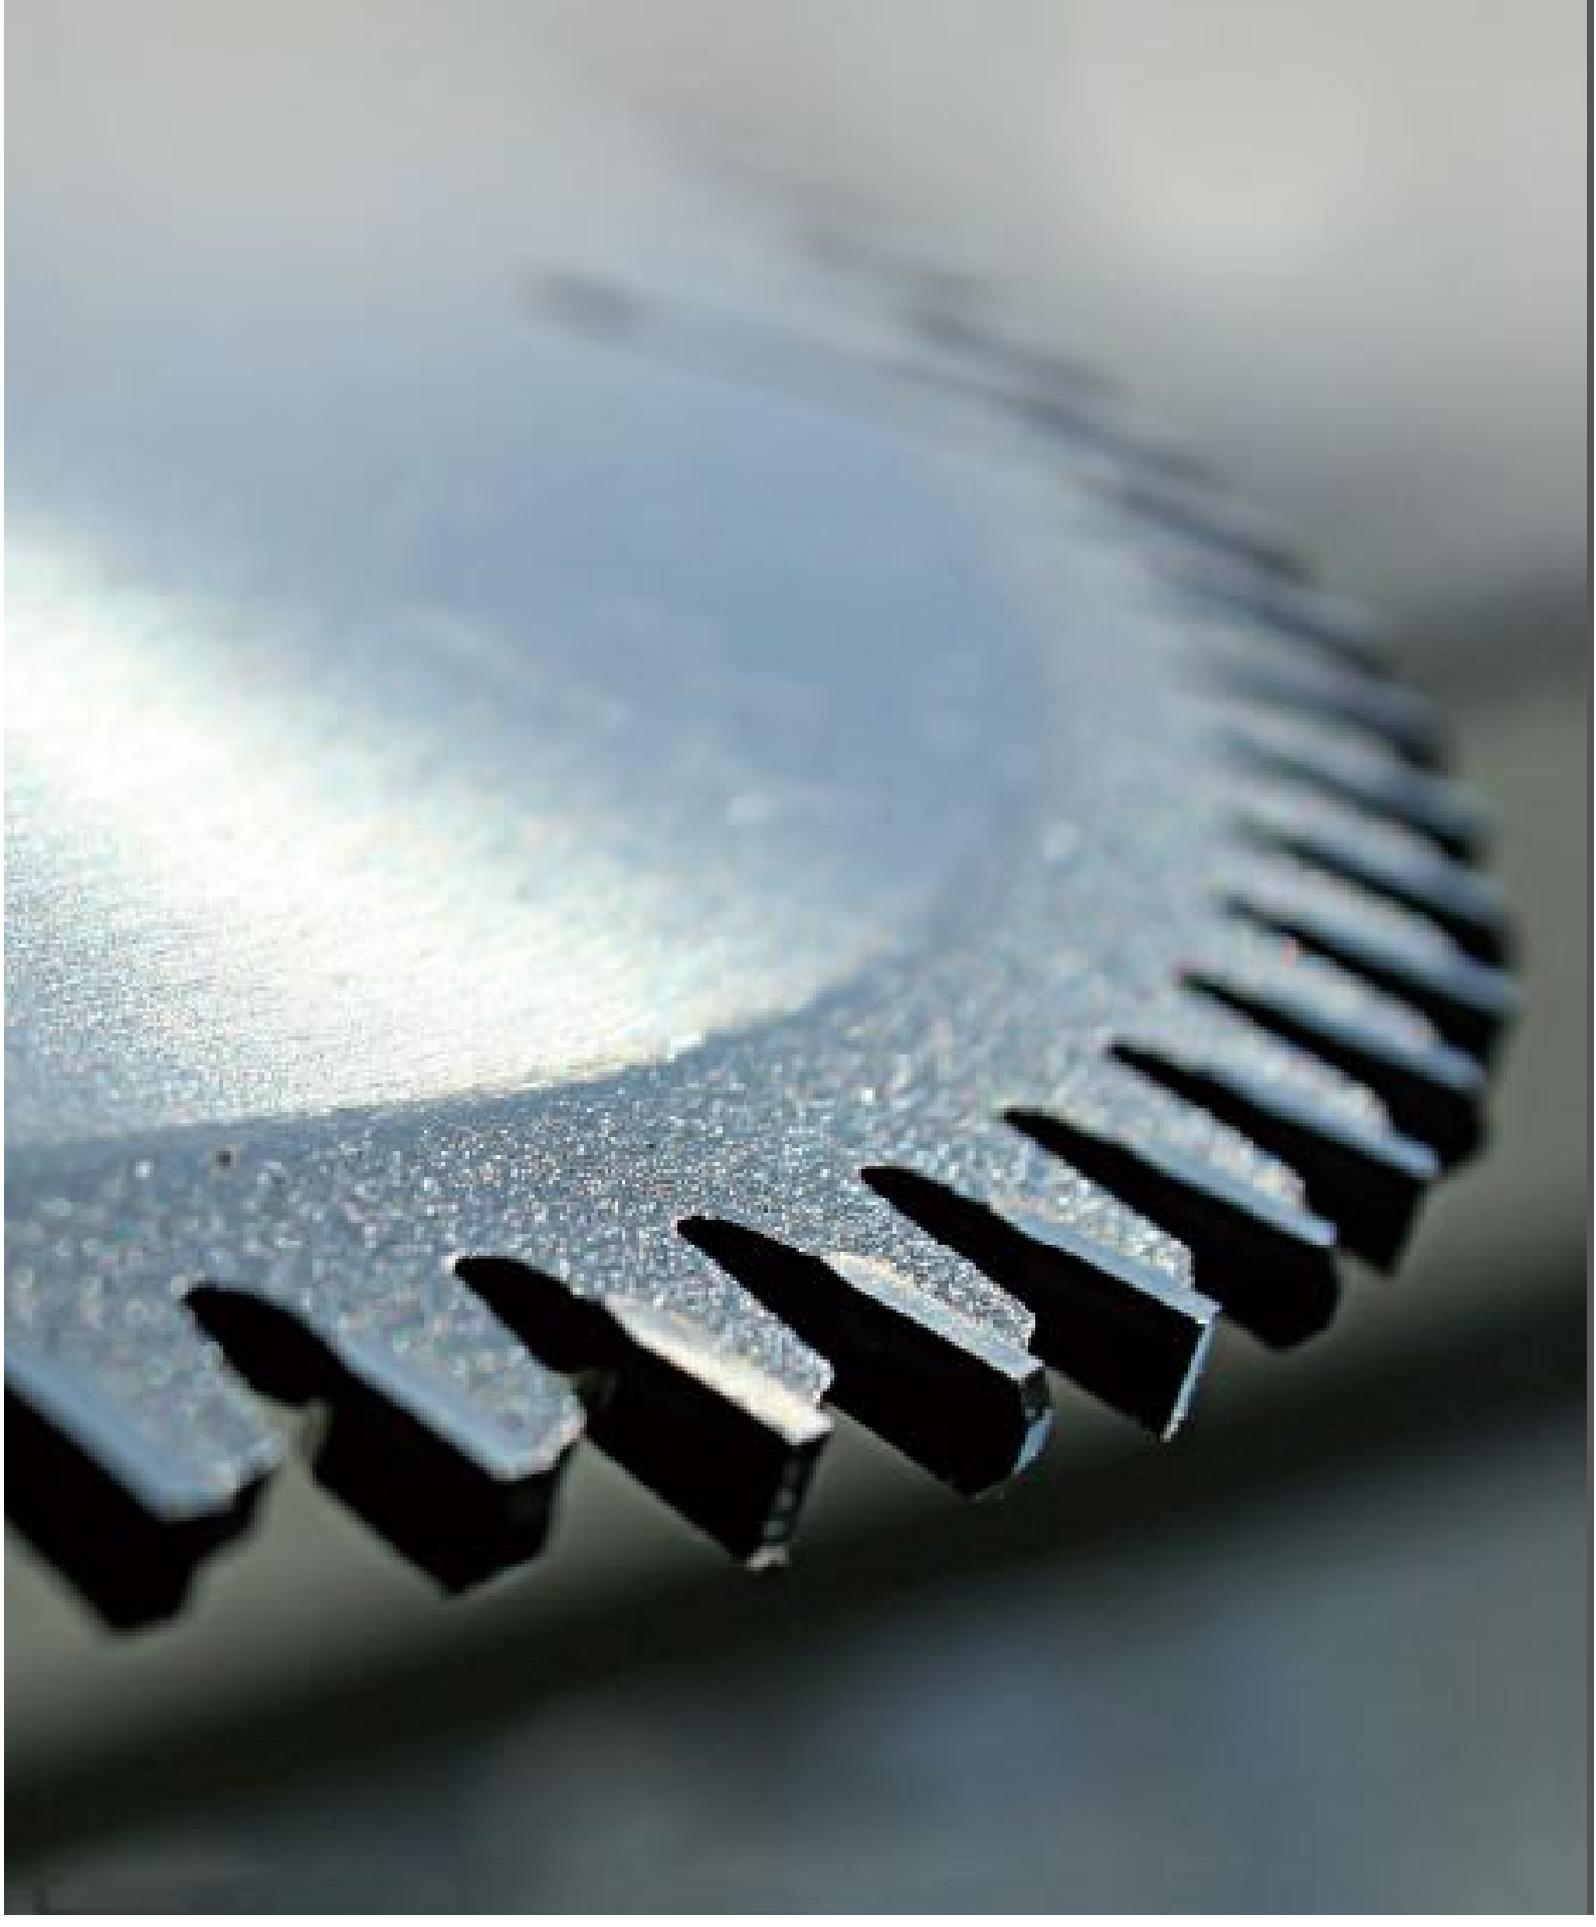

Diamond Wheels

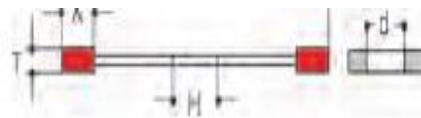

Electro Deposited Diamond Wheel / Standard Range

Best in cutting softer materials such as Resin board, Fiberglass, pipe etc

- The protruding grit volume allows for easier cutting of marble, sand stone and limestone.
- There is no heat generated therefore the cutting of material is quicker and easier.
- Have a high grit density which gives a higher accuracy when cutting.



Segmented Type

D	T	X	H	d	Color	For Material	For Model	Part No.
115	-	-	22.23	-	Silver	Marble, sand stone and limestone	115mm Grinders	D-25024
180	-	-	22.23	-	Silver	Marble, sand stone and limestone	180mm Grinders	D-25030

Corrugated / Mid Range

Dry


* Wet

- It will be discontinued once current stock is over



D	T	X	H	d	Color	For Material								For Model	Part No.	
						1	2	3	4	5	6	7	8			
125	2	7	22.23	-	Blue	⊗	⊗	⊗	○	○				Ideal for Ceramic Tile	125mm Grinder	• A-80690
180	2	7	22.23	A	Blue	⊗	⊗	⊗	○	○					180mm Grinder	• A-80709
110	1.5	4.0	20	-	Gold	⊗	⊗	⊗		⊗					110mm Cutter	• *B-01214
110	1.5	6.0	20	-	Gold	⊗	⊗	⊗	⊗						110mm Cutter	• *A-07238


Blade Anatomy

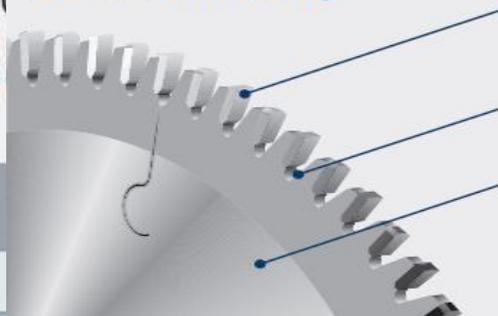

Kerf: Width of cut (also largest width of saw tooth)

Gullet: Cutaway area between teeth for efficient chip removal

Plate: Body of the blade, which supports and guides the teeth

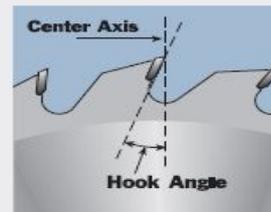

Hook Angle: Angle of tooth relative to blade radius, which determines aggressiveness of cut and workpiece finish

125	2	7	22.23	20	Blue	⊗	⊗	⊗	○	○				Ideal for Ceramic Tile	125mm Grinder, 125mm Cutter	• A-02761
110	1.2	6	20	-	Blue			⊗	○	○	⊗	⊗		Ideal for Bullet proof Glass	110mm Cutter	*B-00795

Professional Series Metal Cutting Blades

Cooler running, longer life, less dust and cleaner cuts than bonded abrasive wheels

Extra-hard teeth with 0° or negative hook angle provide fast, clean cuts with minimal burrs

Expansion slots allow blade to expand and contract without warping

Thick plate, hard body for accurate and true running



Diamond Wheels

Features in terms of Shape



Segmented Type:

Most commonly used. Blade has slits and a layer of diamond is sintered on the edges. Cuts faster than continuous rim type and maintains average cutting surface.



Segmented Wave Type:

This wheel has slits like the segmented wheel. Each segment has many notches (Wave). These notches ensure:

- Fast cutting with less resistance.
- Smooth debris removal.
- Less loading on wheel.



Corrugated Type:

This wheel has notches around the Rim. Has a characteristic between Continuous Rim and Segmented Type. Has faster cutting like Segmented Type. At the same time, can attain cleaner surface like continuous rim without broken edges.



Continuous Rim Type:

Has layer of diamond with uniform thickness around the entire rim. Can maintain clean surface even on crusty, brittle materials. Cuts with accuracy but not as fast as segment type wheel.



Electro deposited Type:

Diamonds are electro deposited and have more exposure than bonded type. Cuts faster and more efficient.

The Makita Diamond Wheel Series offers Three types of wheel grades to meet user needs.

Premium Range:

This yields the highest performance in both cutting speed and durability

Mid Range:

This achieves an optimum balance between performance and price.

Standard Range:

This has the attraction of a reasonable price tag.

GTAS



▶ Max. rpm of angle grinder dependent on circumferential speed in m/s and disc diameter

▶ Cross bar, red = 80 m/s

Tips on application:

Blue = metal

Green = stone

Black = Inox



Sell-by date:
the disc can be used without restriction until the date stated, for example:
V01/2013 = 1st quarter of 2013
V04/2013 = 2nd quarter of 2013
V07/2013 = 3rd quarter of 2013
V10/2013 = 4th quarter of 2013

oSa symbol

Work safety

▶ Application restrictions

▶ Do not use a damaged disc

▶ Part number

▶ Manufactured in compliance with the guidelines of the EN standard 12413


▶ Disc dimensions – mm

▶ Disc dimensions – Inch

▶ **A** = Aluminium oxide (high-quality aluminium oxide) for working in metal
C = Silicon carbide (SiC) for working in stone
30 = Grinding grit mixture:
24-30 = medium coarse (dia. of the grit in accordance with FEPA-standard: G 24 = 0.6 to 1.0 mm, G 30 = 0.5 to 0.8 mm)
S = Disc hardness (DIN ISO 525):
L to O = medium, P to S = hard, T to W = very hard
BF = Bakelite (artificial resin) bonded and reinforced with fibre fabric

▶ Does not contain iron, chlorine and sulphur

Grinding / Cutting/ Brushing Accessories

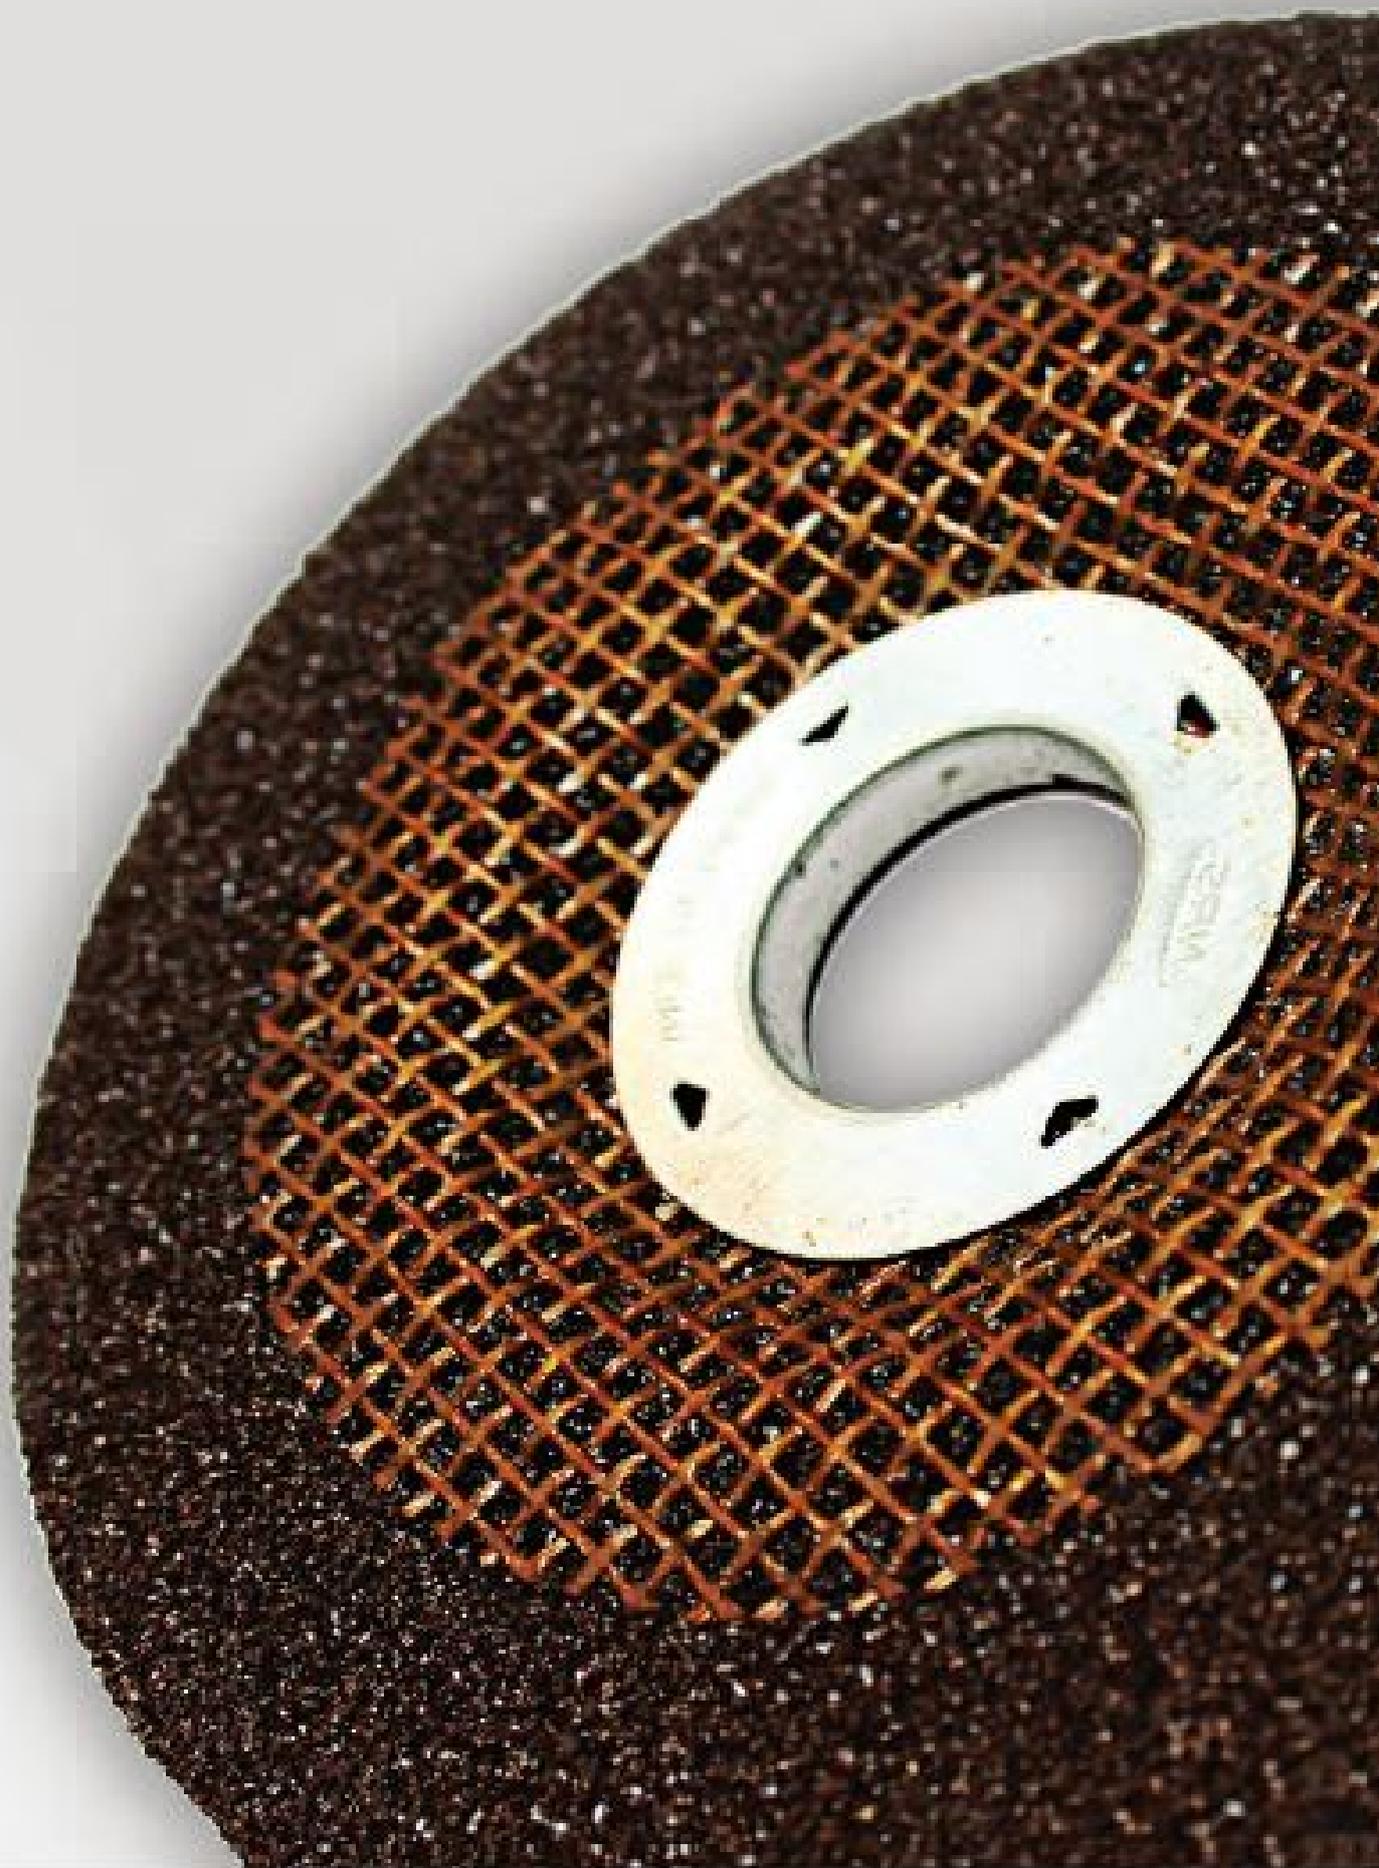

Grinding / Cutting: Abrasive Wheels

Abrasive cut-off wheel for portable cut-off

- For all ferrous materials - Steel, Cast iron and other hard metals



Size (mm)	Grit	Pc. Per. Pack	Part No.
305 X 25.4	A36P	25	A-87650
355 X 25.4	A36P	25	A-87672
405 X 25.4	A36P	25	A-87694

Abrasive cut-off wheel for angle cutter / Cutter

- For cutting masonry materials, concrete, marble, slate, etc.

A: Reinforced with 3 sheets of fiberglass

B: Reinforced with 2 sheets of fiberglass



- It will be discontinued once the current stock is over

Size (mm)	Material	Pc. Per. Pkg	Part No.
110 x 2.5 x 20	Concrete, marble, slate	10	• 792153-6
305 x 3.2 x 25.4	Steel	5	792301-7
305 x 3.5 x 25.4	Brick	25	A-89735

Sawing



Slide Compound Saw
LS1216L

GTAS

355MM TCT METAL CUTTING SAW

DW872

Power Input 2200 watts

No Load Speed 1300 rpm

Wheel Diameter 355 mm

Max. Cutting Capacity at 90° Square 100 x 100 mm

Rectangular 75 x 130 mm

L-Shape 92 x 92 mm

Rounded 130 mm

Weight 22.5 kg



Portable Cut-off

203 

2414NB 355mm (14") D-shape handle for easy gripping.

- Spark diversion guard for operator's safety.
- Adjustable guide plate 45 degrees right and left at 3 locations.
- Quick releases vise for secure stock retention and fast repeated cut-offs.
- Convenient storage space for Wrench.
- Adjustable depth stop for precise, repeatable cutting depth.



Continuous rating Input	2,000W
Wheel dia.	355mm (14")
Hole dia.	25.4mm (1")
No load speed (rpm)	3,800
Dimensions (L x W x H)	500 x 280 x 600mm (19-11/16" x 11" x 23-5/8")
Net weight	16.2kg (35.7lbs)
Power supply cord	2.5m (8.2ft)



Slide Compound Saw

LS1016 255mm (10") Large cutting capacity.

- Available for cutting 168mm(6-5/8") crown molding leaning against fence.
- Available for cutting 120mm(4-3/4") base board with standing.
- Sturdy structure by using 4 slide poles.
- Smooth and accurate cut by 6 liner ball bearings.



Continuous rating Input	1,510W
Capacity	at 0 degrees
	: 91 x 279mm (3-5/8" x 11")
	at 45 degrees
	: 91 x 197mm (3-5/8" x 7-3/4")
Blade diameter	250 - 260mm (9-7/8" - 10-1/4")
No load speed (rpm)	3,200
Dimensions	718 x 640 x 671mm
(L x W x H)	(28-1/4" x 25-1/4" x 26-1/2")
Net weight	23.7kg (52.2lbs) : LS1016L
	23.6kg (52.0lbs) : LS1016
Power supply cord	2.5m (8.2ft)



Metal Cut-off Grinder Bosch GCO 240 Professional

Redefining power in 14" cut-off saws

- 1 High overload capacity for the toughest of applications
- 2 Stable on uneven cutting surfaces

GTAS

RP1800 12.7mm - 1/2" Plunge Router



- Linear ball bearing for super-smooth plunge action
- Precision cutting depth adjustment, cutting depth is adjustable in 0.1 mm increments
- Easy to read cutting depth scale
- Quick depth setting button
- Tool-less one touch change of template guide

Included accessories: Straight guide (342428-9), 1/2" collet (763808-0), 1/2" to 1/4" collet sleeve (781030-7), wrench (781030-7)

Router (Plunge type)

107

RP0900 8mm (3/8") High durability and good design router.

- 0-35mm(0-1/8") plunge depth capacity with 3 adjustable depth stops for repetitive depth routing.
- Scale level for adjusting the depth of routing



Continuous rating Input	900W
Capacity	Collet : 8mm or 3/8"
Base	145 x 110mm (5-3/4" x 4-5/16")
No load speed (rpm)	27,000
Dimensions (L x W x H)	256 x 110 x 217mm (10-3/32" x 4-5/16" x 8-17/32")
Net weight	2.6kg (5.9lbs)
Power supply cord	2.5m (8.2ft)



UB1102 - Blower



Technical Specification

Continuous rating Input	600W
Air volume	4.1m ³ /min
Air pressure	5.7kPa (580mm H ₂ O)
No load speed	16,000rpm
Dimensions (L x W x H)	479x185x178mm (18-7/8"x7-1/4"x7")
Net weight	2.0kg (4.3bs)
Power supply cord	2.5m (8.2ft)

GTAS



Capacity 16 kg, Ø 225 mm. With handle. With high pressure hose (1500 mm), valve, rigid spout and 4 jaws coupler. Suitable to all type of grease NLGI0, NLGI1, NLGI2, NLGI3. The pedal allows you to pump the grease with little effort and keep your hands free

GTAS

Manual Fluid Extractor 9.0 Liter



- Clean and simple way to evacuate and dispense fluids
- Perfect for Boats or Personal Watercraft or any application with no drain plug
- Manual fluid extractor can be used to extract many kinds of non-explosive liquids
- Includes 3 Tubes And 3 Adaptors (blue end caliper bleeder adapter for brake bleeding)
- New safety design, when the tank is full of liquid, the vacuum will be shut off automatically.

GTAS



**90L Oil
Drainer**

Height range:
124 - 170mm
Steel drum
MCOS1011

**Oil Drain
Facility**

Height range:
103 - 170mm
For use with
a drum
MCOS1012



GTAS

The automatic hose reels model MP are suitable to distribute air for professional use.

The hose reels rewind automatically the hose by a spring located in the drum. The hose can be stopped at the desired length. The hot-galvanized steel structure is moulded and coated with electrostatic polyester powder resistant to UV rays. The parts in contact with the fluid are all made with material resistant to corrosion.



GTAS

MICHELIN PRESSURE WASHER MPX 120 L

Michelin, leading global tire manufacturer is committed to making travel safer, more efficient and more enjoyable. That is why it has developed a comprehensive collection of products to offer you even more comfort, protection and styling.



GTAS



Flygt 2700 range

Abrasive and corrosion resistant drainage pumps

Flygt 2700 pumps handle large flows up to 80 l/s (1000 GPM), high heads to 75 m (250 ft.), and solids up to 80 mm (3.2 in.) in diameter. Available with power ratings from 1.5 to 5.6 kW, 50 hz (3.1 to 13 hp, 60 hz), these abrasive and corrosion resistant pumps are engineered for acidic and abrasive dewatering applications in mines, power stations, paper mills, steel mills and chemical plants.



1.5" DIAPHRAGM PUMP STAINLESS STEEL



Item: SS1-25

Max. suction lift: dry 4m/ wet 8m

(Suction height changes with the different combinations of ball, seat and the diaphragm materials.)

Max. size pumpable solids: 4mm

Suction and discharge size: 1" /Npt /F


Air inlet size 1/2"

Max. flow rate: 157 L/min

Max. head : 84m

Max. air inlet pressure: 8.4bar

Max. air consumption 60scfm (1.7m³/min)

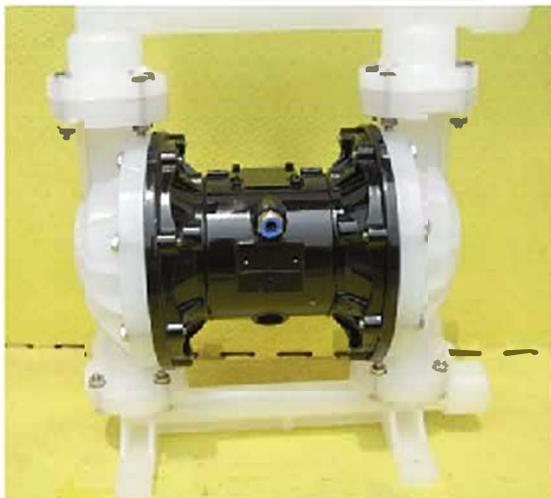

GTAS

Abac Air Compressor - 3HP - Static Belt Drive - 200 Litre

Motor HP	3.0
Air Receiver Litres	200
Displacement CFM	13.0
Free Air CFM	9.0
Electrical Phase	1
Dimensions (mm)	1520 x 540 x 1040



GTAS

ABAC MONTECARLO B20

Base line range Base Line products are the solution to meet the needs of all hobbyists. Simple and reliable compressed air.

Highlights:

- Pump Oil Lubricated
- Motor 2hp - 1.5kw
- Voltage 230/50/1 13amp Plug
- Tank Size 50 ltrs
- Output 190l min - 6.7cfm Displacement
- Max Working Pressure 8 Bar
- dB(A)
- 32kg



GTAS



- Large wheels and convenient handle make transport easy
- Simple, user friendly controls
- Suitable for all home and hobby applications
- Powerful machine with a 2 Hp lubricated pump
- Direct Driven Lubricated Compressor
- 50-litre tank for a large air reserve

GTAS

Black & Decker BD 195/5 MY T portable electric air compressor - 1.5 hp motor - 5 L



Direct drive - absorbed air: 180 L/min - 10 bar - 1.5 hp - 5 litre tank - hobby range - mini air compressor. Free items: oilless air compressor maintenance kit



GTAS

EP450 Heavy Duty Electric Airless Putty Sprayer, it is electric Piston Pump but with long piston rod, low suction valve system. Ideal for spraying high viscosity materials, such as putty / drywall mud / gypsum / white cement / lime based / floor epoxy / fireproofing / anti-corrosive paint / emulsions and fillings etc.

EP450 PUTTY / PLASTER AIRLESS PAINT SPRAY MACHINE. CHINA PAINTING SPRAYER FOR WALL.

EP-450 Electric piston Pump Airless Paint Sprayer	
Mode	EP450TX
Power Source :	Electric Motor & Piston Pump
Motor Power :	2800W/3.7HP
Power requirement :	220V/50 HZ
Max.Delivery :	6L/min
Max.Working pressure :	227bar
Motor speed	4200
Max nozzle size:	0.037"
Equipped with	spray gun, spray tip, tip guard, suction hose, high pressure hose
G. W:	74kg



GTAS

10 AMP 3 Phase 5 Pin Round Extension Socket

- 500 Volt
- 10 Amp
- 5 Pin Round Pin
- Straight Extension Socket



GTAS



GTAS

Description:

5 Pin Straight PLUG - Three Phase IP66

Special Instructions:

IP66 5 pins three phase straight plug.

Available Options:

20 Amp 5 pin

40 Amp 5 pin



GTAS



SWITCHED SOCKET

OUTLET COBINATION

20 AMP 500V 5 ROUND

PIN IP66.

GTAS

Multiple-out socket



Product description

General Introduction:

1. High performance PP engineering plastics, robust and reliable, good electrical insulation
2. Good quality copper alloy pin ensures lower temperature rise and high electrical conductivity
3. Cost effective wiring solution for indoor and outdoor application
4. PA nylon material available
5. Ideal for use in camper vans and refrigerated vans, power tools, workshop, engineering, compressors, etc.

The data:

16A

Input: 1.- 1 EEC form the power plug | 16 to 3 pins

2. output - 3 EEC form the 3-pin 16A power outlets

32A

Entry: 1.- 1 EEC form the plug of 32 to 3 pins

2. outgoing - 3 Form of the EEC the sockets of 32 to 3 pins

GTAS

High Quality Weatherproof Powerpoint Switched 2 Gang Socket-Outlet

Weatherproof Switched Socket-Outlet / Powerpoint



2GANG 15A

switched socket-
outlet switched socket-
outlet switched socket-
outlet switched socket-outlet

Approval: SAA

Certificated to AS/NZS 3112
and AS/NZS 3133

Rated Voltage: 250V AC

switched socket-
outlet switched socket-
outlet switched socket-
outlet switched socket-
outlet

Rated Frequency: 50/60Hz

IP Protection: IP53

GTAS

	BREAKER CIRCUIT AUB7R 1P+N 6A 30 MA
	Breakers Schneider 6Amp and 20 Amp spare parts for light towers
	CENTRE PUNCH TOOL FOR SS304 CLAMPS
	CLAMP-CP304-051 CENTRE PUNCH CLAMP SS304 SIZE 51
	CENTRE PUNCH CLAMP SS304 SIZE 89
	CENTRE PUNCH CLAMP SS304 SIZE 102

GTAS

YATO Cable reel 50 m YT-8108

25M ARE AVAILABLE

Color: Black, blue and red

Material: Plastic reel and handle + metal support

Dimensions: 30 x 22 x 42 cm (W x W x H)

Cable length: 50 m

Current / maximum voltage: 16 A / 230 V

Maximum load capacity: 1200 W (rolled) - 3600 W (unwrapped)

Operating temperature: $56 \pm 5^{\circ} \text{C}$

Protection class: IP44

H05RR-F 3G2.5 Cable

French type E outlets (grounded)

Overheating protection

With lids for extra protection

SKU: 408114

YATO brand

Ref. ManoMano ME3245457 (YT-8108).





CF Hand Chain Hoist

1/2 through 5 Ton capacity

Harrington CF hand chain hoists give you a practical alternative thanks to an economical design using fewer parts for trouble-free service. Outstanding durability is due to a die-cast aluminum body and high-strength, heat-treated main pinion shaft and load gear. Pre-lubricated ball bearings, precision machined gears, and Weston-style load brake make lifting smooth and easy while allowing long service and low maintenance.

Many Benefits From More Features:

- Experience exceptional strength with a thick die-cast aluminum body.
- Handle tough demands with high-strength, heat-treated main pinion shaft and load gear.
- Get positive braking action with Weston-style load brake incorporating two moisture-resistant brake pads with four braking surfaces.
- Minimize manual effort thanks to smooth running, pre-lubricated ball bearings, and precision machined drive train components.
- Simplify maintenance with fewer parts and an easy-to-work-on design.

Capabilities To Count On:

- 10-foot lift is standard, 15- and 20-foot lifts are also stocked; nonstandard lifts and hand chain drops available as well.
- Grade 100 heat-treated manganese alloy load chain resists abrasion and wear while minimizing chain weight.
- Forged and heat-treated alloy steel hooks are designed to open slowly and not fracture under excessive loads.
- Test certificate verifies that every hoist has been factory load tested to 125% of rated capacity, in accordance with ASME B30.16 requirements.

Options: (See Pages 28-29)

- Chain container
- Corrosion-resistant chain
- Inspection hook



GTAS

Kinetic Series manual chain hoists

0.25 to 20 metric ton lifting capacities

Ingersoll Rand Kinetic Series premium manual chain hoists are engineered for the harshest of environments and deliver exceptional durability to meet your toughest demands. With grade 100 Electro-galvanized chain, cast hook latches, all steel construction and extensive use of bearings these hoists are designed to LAST with minimal down time.

Kinetic Series hoists; Safe, Compact, Durable.

Features

- All steel construction for exceptional durability and light weight
- Reinforced double pawl brake with large diameter pawl springs for a highly dependable brake system
- Single chain fall through 3 metric tons
- Full bearing construction on load sprockets and pinion shaft for reduced pull effort and longer life
- Premium grade 100, Electro-Galvanized chain designed for exceptional corrosion resistance for increased durability.
- Heavy duty cast hook latches designed for less latch replacements
- CE certified; hoists meet or exceed regional requirements including ASME B30.16, HST-2M.





**Overload protection
device for option**

Manual Hoist

HSZ-B Chain Block 0.5~20T

- Model: HSZ-B
- Capacity: 0.5~20T
- Standard lift is 10 ft(3m). Additional lift is available.
- Compact size and light weight
- High strength, grade 80 alloy steel load chain
- Hooks are alloy steel , heat treated and equipped with hook latches and inspection points
- Our manual hoist meets or exceeds international standard.

GTAS



THE TORCON OVERLOAD PROTECTION SAFETY DEVICE ENGAGES WHEN THE HOIST IS OVERLOADED, HELPING TO PREVENT DAMAGE TO THE HOIST, AS WELL AS INJURY TO PERSONNEL.



- Grade 105 galvanized load chain, which adheres to the strict German DIN 5684 standard.
- Free spooling, which automatically brakes when a load is applied.
- Hoist body has an electro-deposited black finish for corrosion resistance
- Internal side plates have hardened steel bushings for excellent load shave & pinion support
- Internal side plates, pinion, pawls, and pawl springs have an electro-deposited coating that helps resist corrosion
- Internal disc hub and ratchet wheel are nickel plated for corrosion resistance

GTAS



GTAS



◆Foldable Hand Cart◆6 Type/Trolley/Travel cartPush Pull Cart Hand singapore Multifunctional Retractable Shopping Trolley Portable Foldable Hand Trolley Carts Aluminum Alloy Travelling Luggage Carts




GTAS

PROFESSIONALS PREFER POWERWELD

**QUALITY
WELDING,
SAFETY AND
INDUSTRIAL
SUPPLIES**

POWERWELD®
QUALITY WELDING, INDUSTRIAL & SAFETY PRODUCTS SINCE 1981

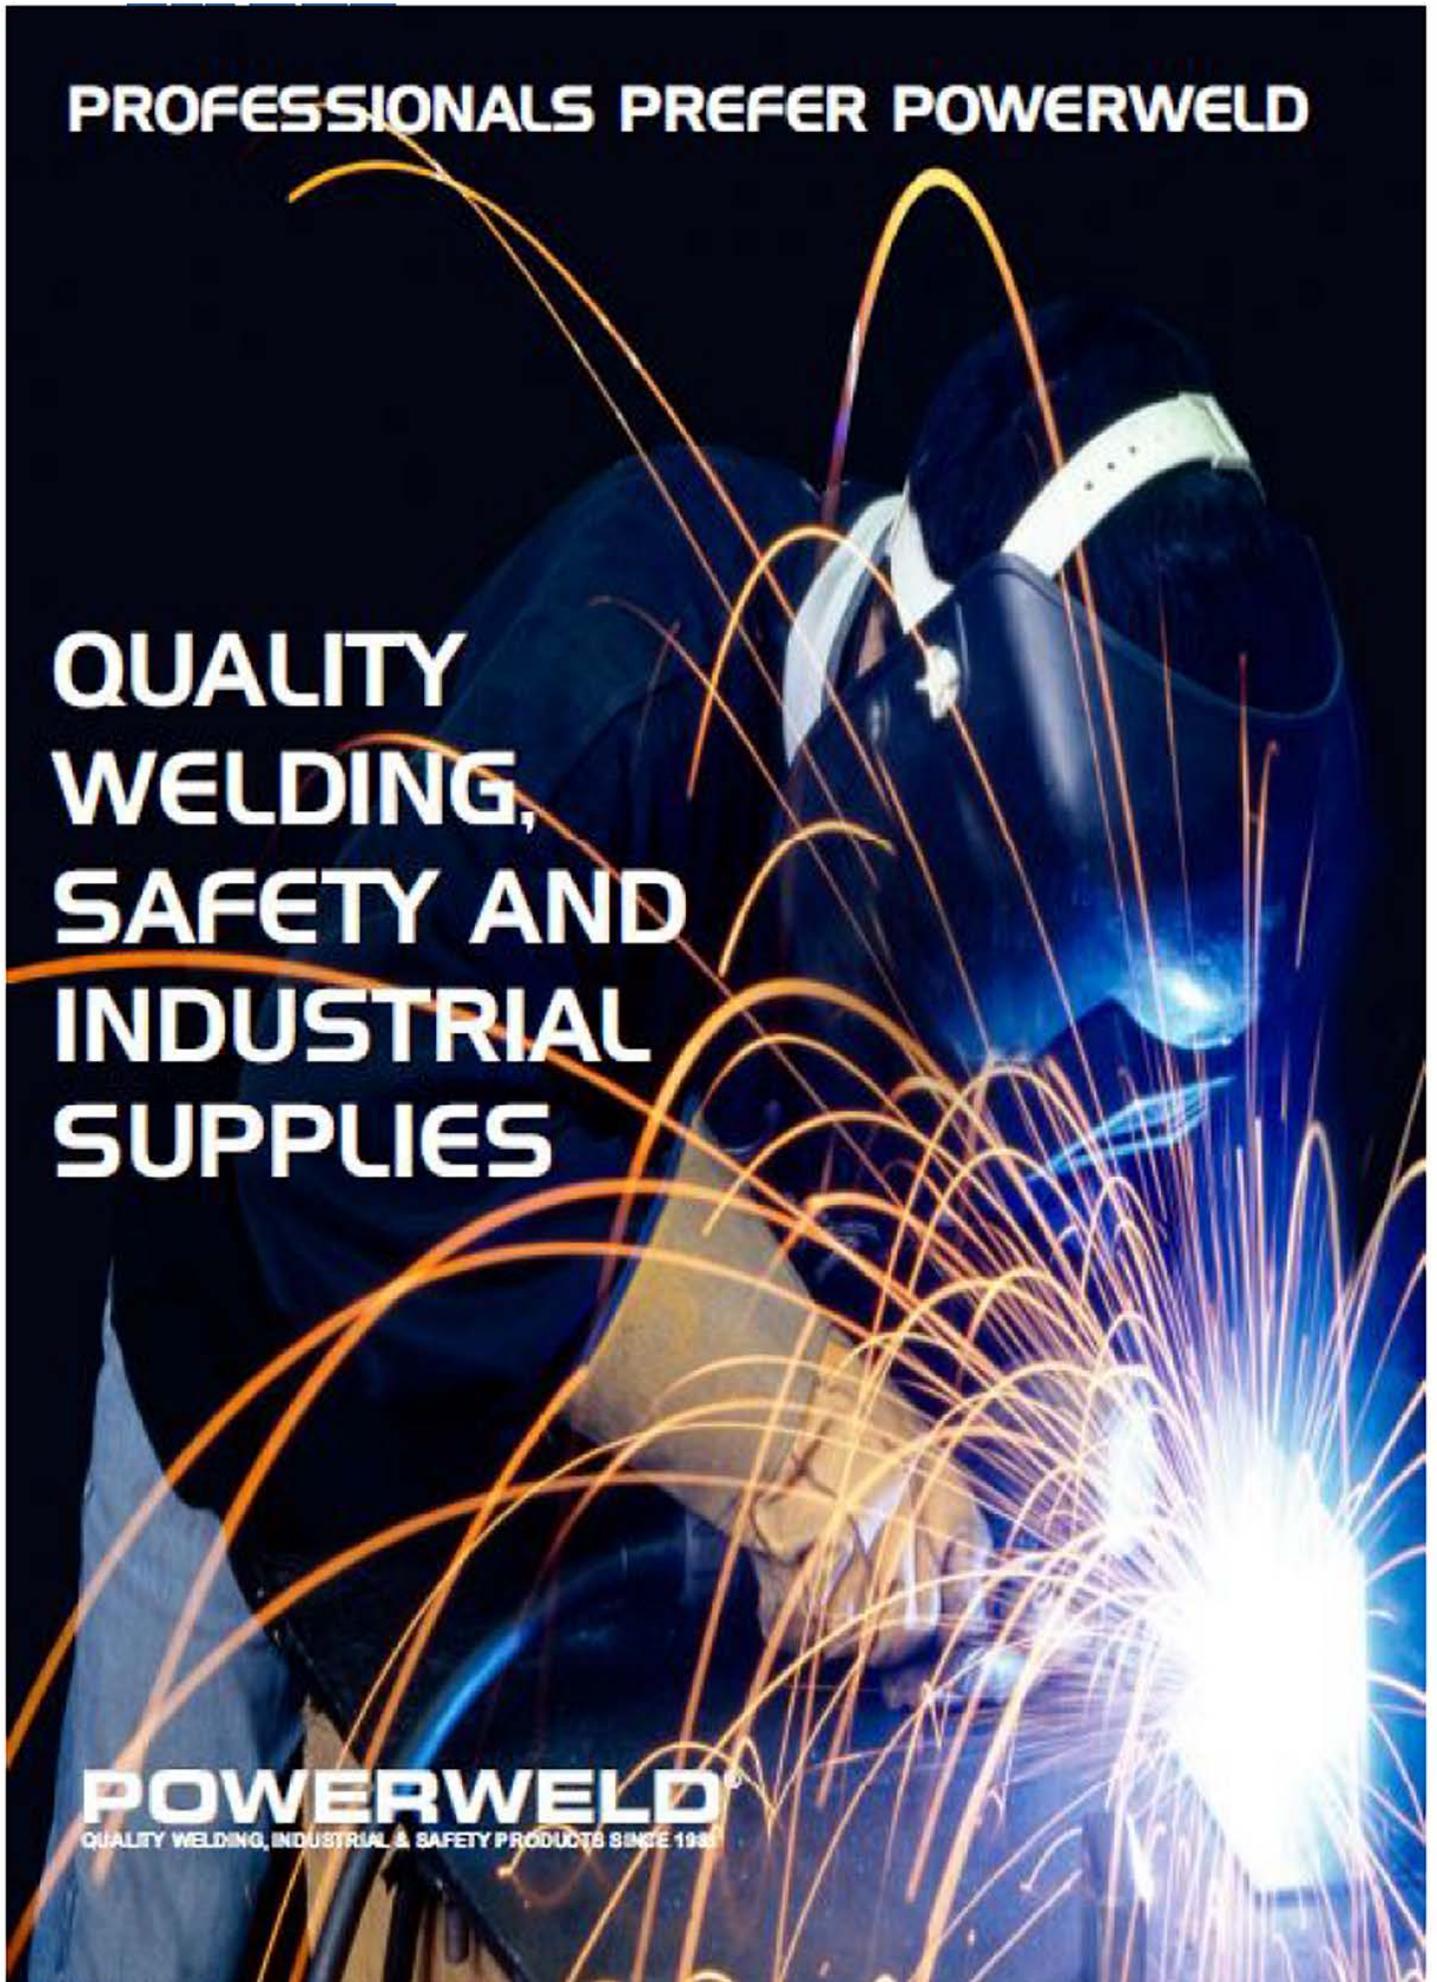

GTAS



GTAS



SKECHERS

W O R K
FOOTWEAR

SHOP NOW




AVAILABLE IN
WIDE WIDTH
WITH MEMORY FOAM

GTAS



GTAS

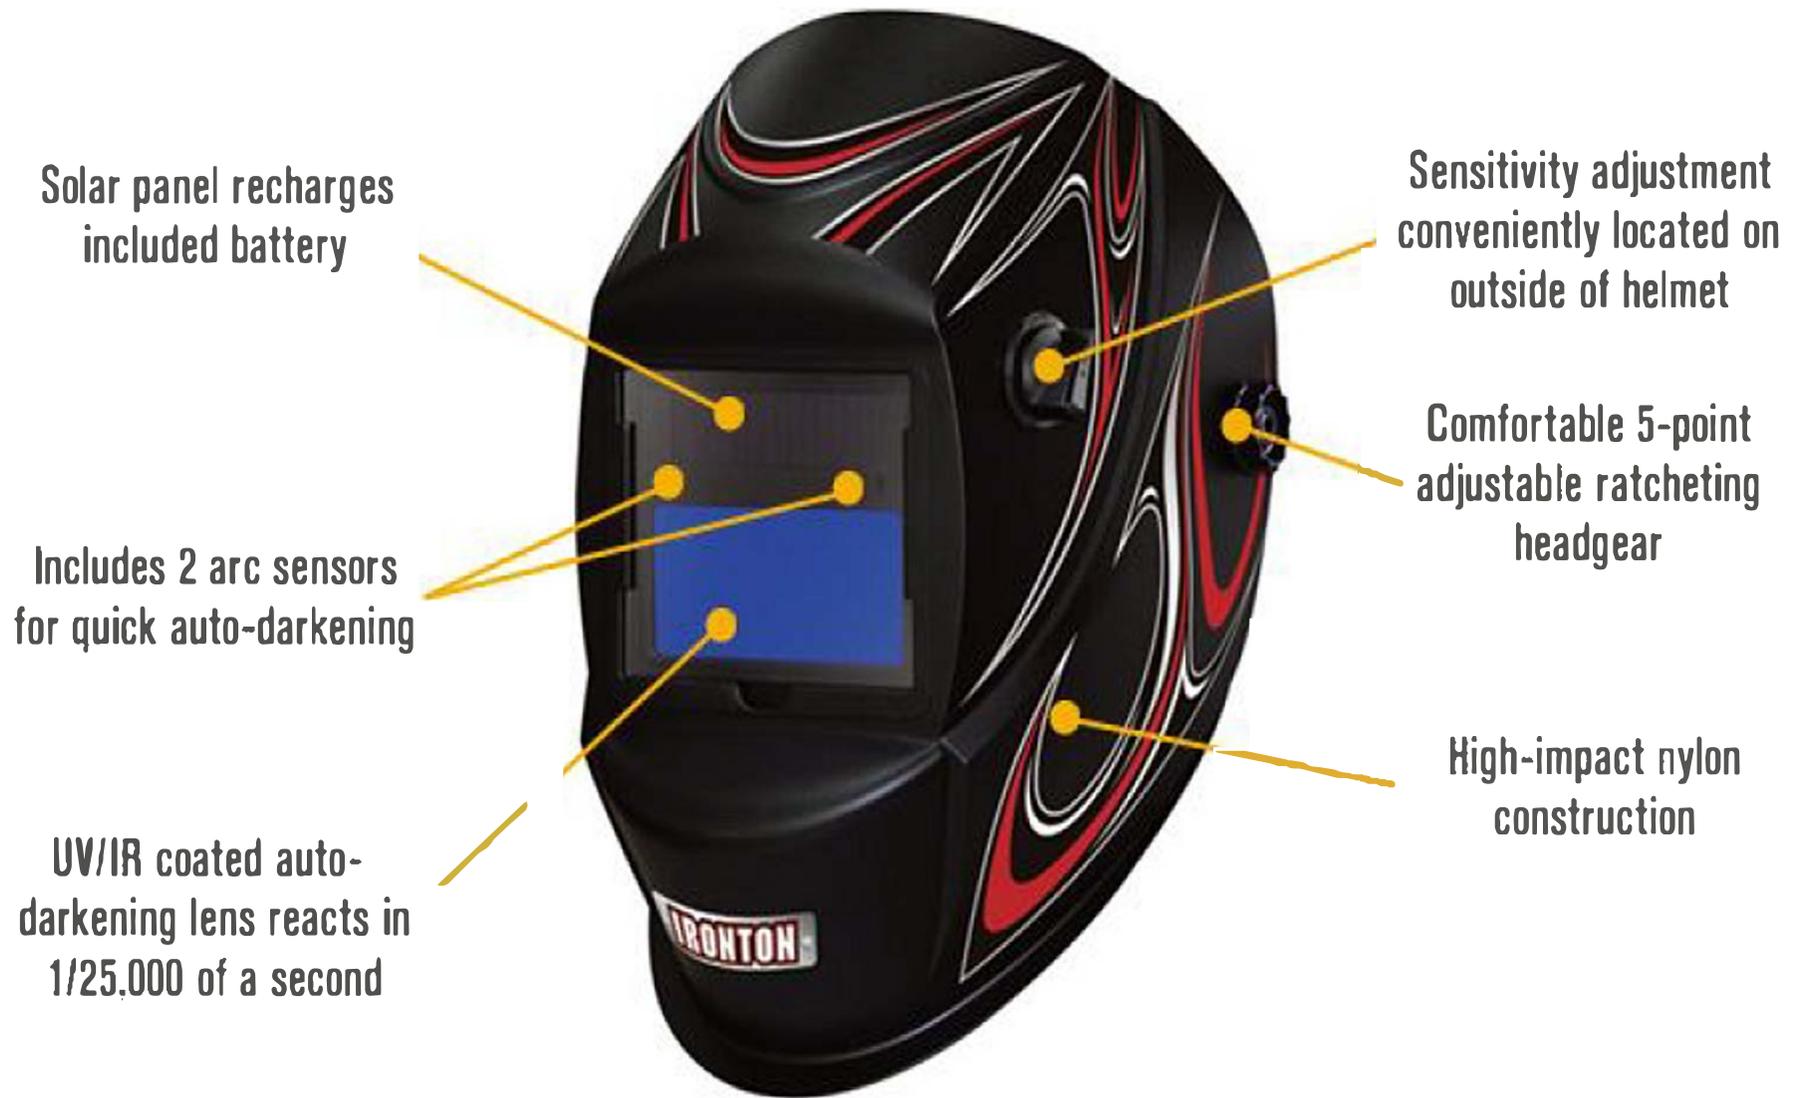



Flip Front Welding Face Shield

Lens size:
108 x 51mm
TOOW4242



Auto Darkening Welding Face Shield

(Non adjustable)
Fixed shade of DIN
10/11 & clear state
shade DIN 4
EWHEL0005



Auto Darkening Welding Face Shield

(Fully adjustable)
Variable shade of DIN 9
- 13 & clear state shade
DIN 4, Grinding function
EWHEL0007



FRAGRAM Auto Darkening Welding Face Shield

Light states:
DIN 4
Dark states:
DIN 9-13
TOOW4244



Auto Darkening Welding Face Shield

(Adjustable)
Variable shade of DIN 9
- 13 & clear state shade
DIN 4, Grinding function
EWHEL0006

GTAS

3M



3M



DELTAPLUS



GTAS



Description	Item Number
4,0 x 305 mm - 100 pack	W054915
5,0 x 305 mm - 100 pack	W054934

size 3 are available too

GTAS

PRODUCT DETAILS:

Brand

Weldman

Input Supply Voltage

320 V

Welding Type

Arc Welder

Frame Material

Iron



Weldman MMA400 Arc Welder is a portable MMA (Manual Metal Arc) welding power source. It features a digital display, several knobs, and switches. The front panel has a large ventilation grille and the Weldman logo. The unit is equipped with two black carrying handles on top.

STANLEY® FATMAX® SPECIALTY HAMMERS



STANLEY
FATMAX

Anti-Vibe® Drilling Hammer - 3 lbs

- Vibration dampening particulate in handle dampens vibrations better than solid core handles
- Anti-Vibe® handle grip helps reduce vibration occurrence
- Bullet nose strikeface provides 50% more power versus traditional heads
- Shatterproof fiberglass handle provides better durability versus wood handles

SKU #	OVERALL LENGTH		HEAD WEIGHT		BOX QTY	CTN QTY	UPC
FMHT56006	11 in	279 mm	3 lbs	1360 g	1	2	076174560080



STANLEY
FATMAX

Anti-Vibe® Engineer Hammer - 4 lbs

- Vibration dampening particulate in handle dampens vibrations better than solid core handles
- Anti-Vibe® handle grip helps reduce vibration occurrence
- Bullet nose strikeface provides 50% more power versus traditional heads
- Shatterproof fiberglass handle provides better durability versus wood handles

GTAS



GTAS.

DynaGrip Threadlocker - High Strength, Red, 10mL



Medium High Strength Threadlocker
Fills gaps up to 0.25mm around bearing housings protecting against loosening
Resistant to oil, water, transmission fluids, glycol products & mild acids
Works within a temperature range of -59°C to 148°C

GTAS



Ball Check valve PN16 100mm galvanized



BOLT SET FOR MANIFOLD GALVANIZED



PN16 gaskets for flanges

GTAS

STROBE LIGHT MAGNETIC AND SOLAR



SMOKE ALARM



Smoke Detectors For Your Safety



Les camions Benne et les machines à louer

Les camions Benne et les machines à louer

